


Magnetic track lighting system

NEW 2021

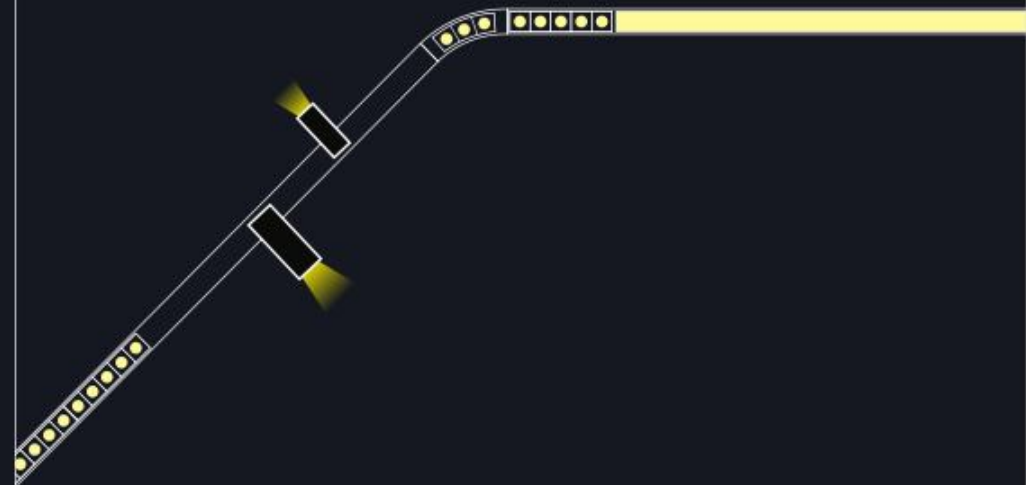

Topenergys Electronic CO Limited

www.topenergys.com info@topenergys.com

<https://topenergys.en.made-in-china.com>

F6,Building#G,Heshengteng Industrial Park, Shenzhen, China

Contents

STANDARD ----- 11-26

Track	11-14
Accessories	15
Dot	16-017
Linear	18-020
Fold	21-024
Wall washer	25
Out	26

ADAPTERS ----- 27-50

Spot	29-36
Halo	37-42
Pendant	43-48
Global	49-50

MINI ----- 51-60

Track	51-54
Dot	55-56
Linear	57-58
Fold	59-60

CURVY ----- 61-66

Track	61-64
Dot	65
Linear	66




newest technologies in architectural lighting. Our products are focused on simplicity & convenience. Our aim is to offer human centric lighting that is based on visual comfort, seamless structure, natural color temperature alternative and smart controlled system.

Our devotion during these years to always produce seamless designs, quality and unique magnetic installations allowed our customers around the world to offer cutting edge products that made them highly competitive in their markets.

CE RoHS 

Magnet Durability

The magnet we use is NdFeB rare-earth permanent magnet, it's the most powerful magnet on the earth. The model is N35, 3600 (+-10%) Gauss, Working temperature up to 80°C, Curie temperature is 240°C (failure at this temperature).

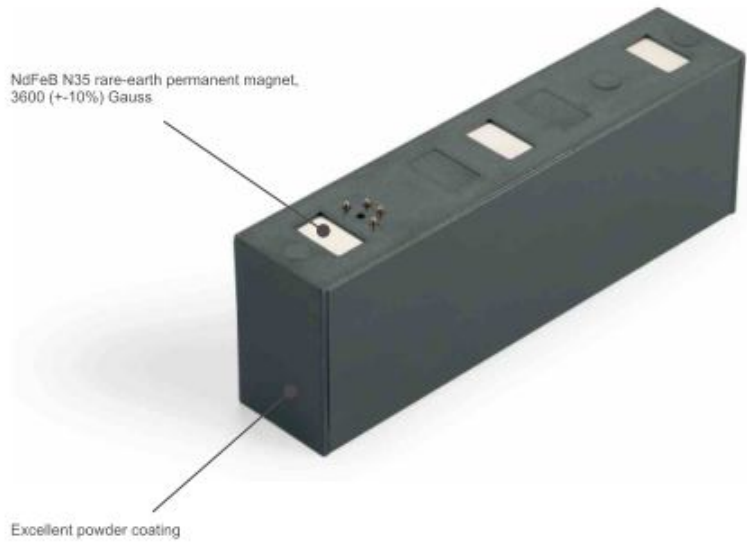


Perfect Surface treatment

The surface treatment offers perfect strong adhesion finishing to protect the fixtures from moisture. In addition, the strong corrosion resistance and good heat conduction and dissipations ensure the fixtures effectiveness. The coating is with special powder to ensure the flawless finishing.

Research & Developments

We are constantly searching & testing technologies to offer the best natural lighting in our fixtures.

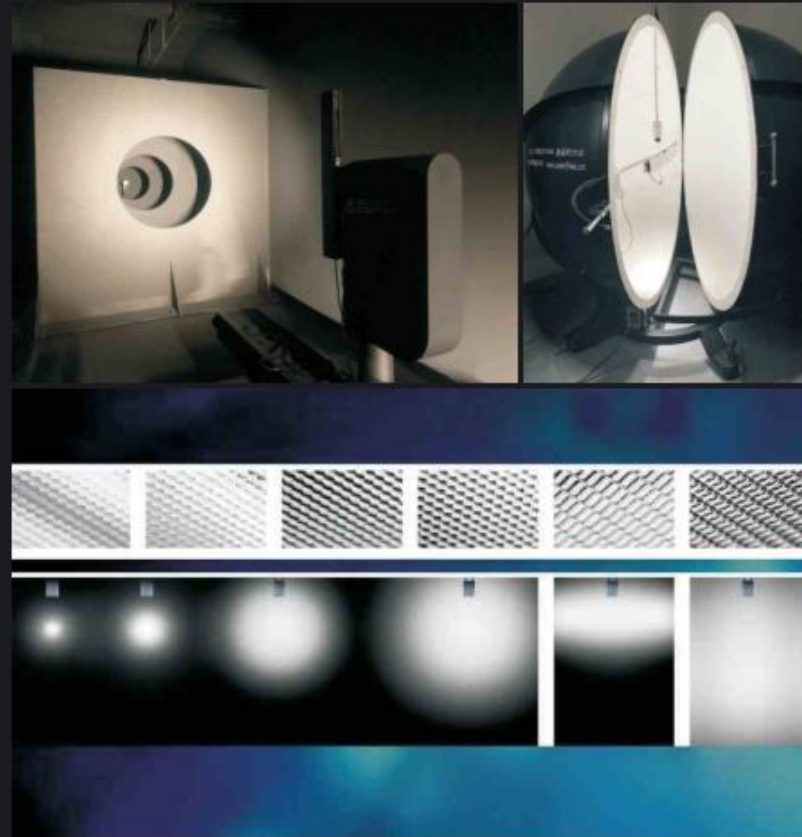



Thanks to the convenient structure our systems are used in various spaces from commercial to residential settings.

TWO DESIGNS

Two sizes of magnetic system to fit all your spaces.

The 39 mm tracks offer lighting fixtures that have higher power & luminance to fit spaces with higher ceilings.

The 27.5 mm tracks are our newest slimmer editions offering seamless designs that look great in residential spaces.




39mm



27.5mm

Two input voltages:

DC24V / DC48V

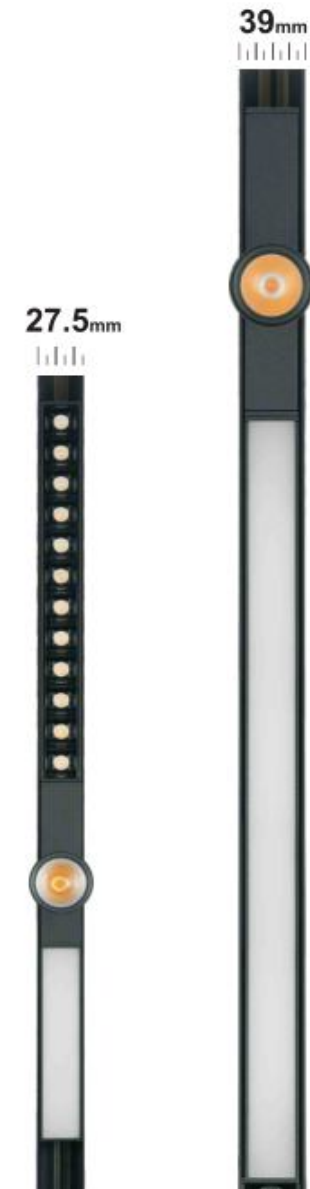

27.5 mm

39 mm

27.5 mm

39 mm

27.5 mm



39 mm

Various Installations:

surface/recessed/pendant

- Black
- White
- Golden
- Black bronze


Seamless connection

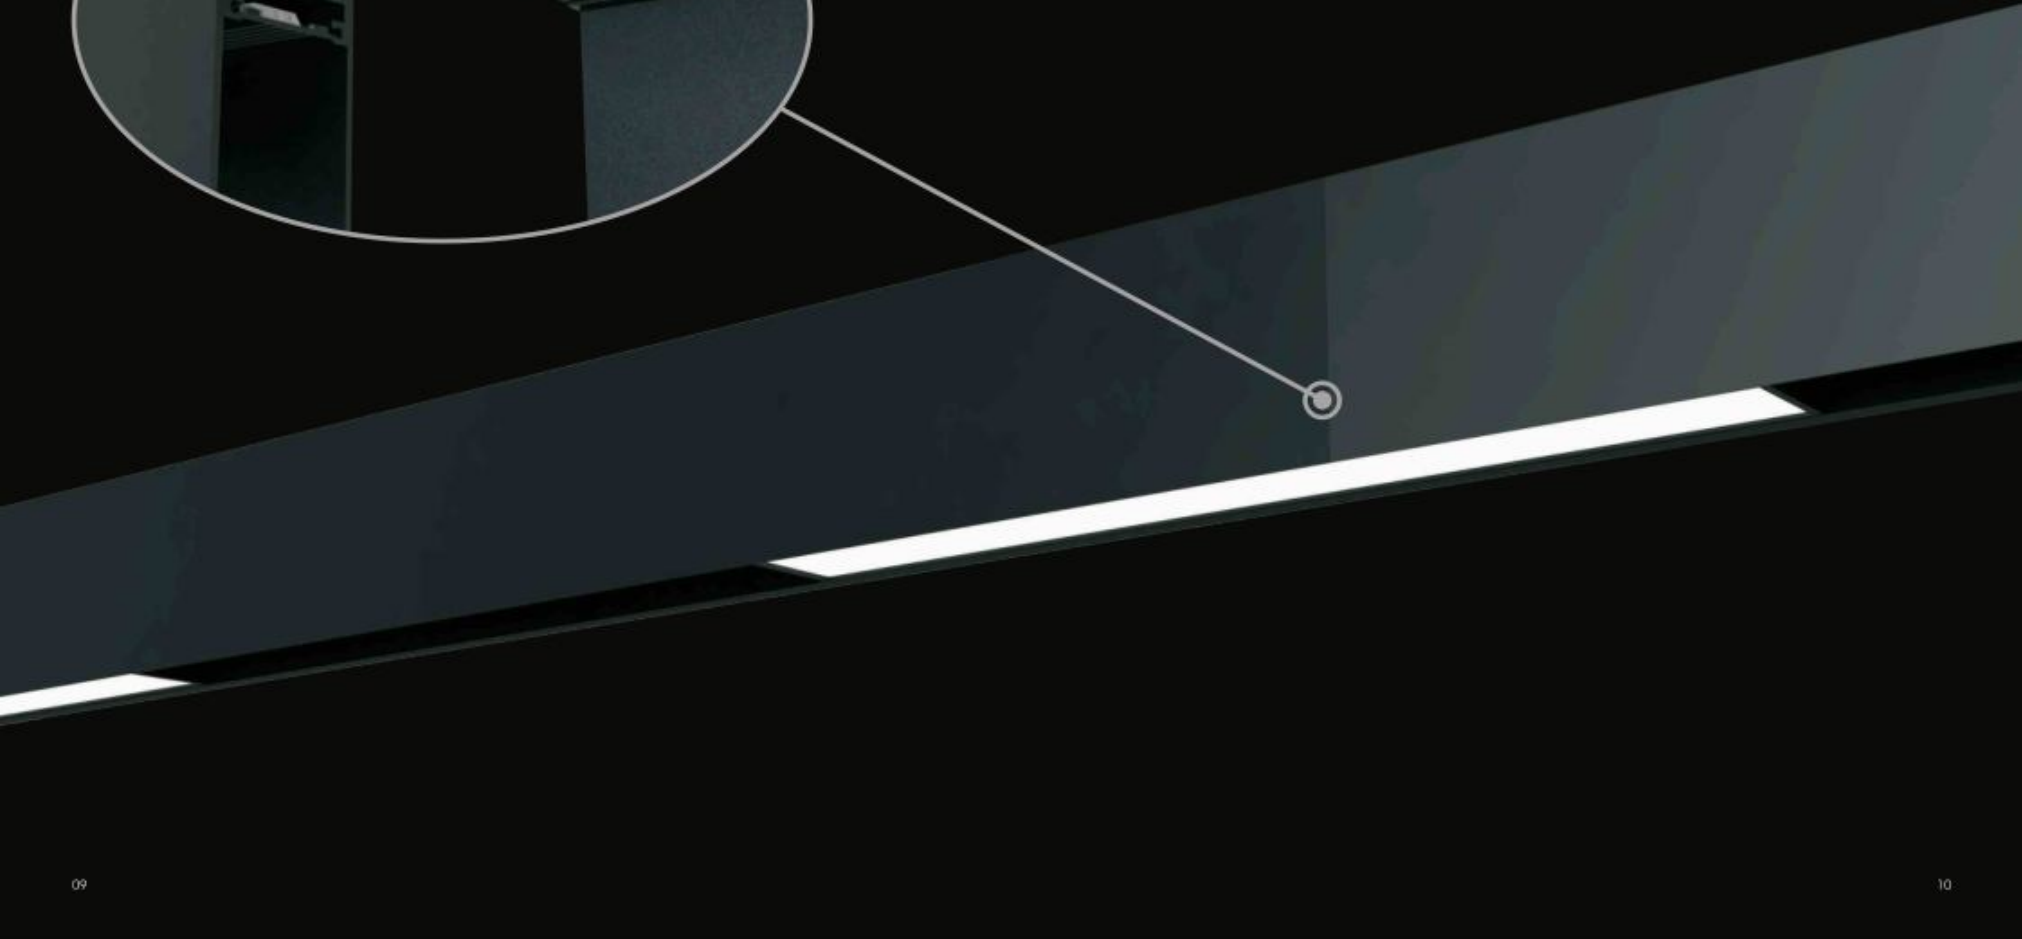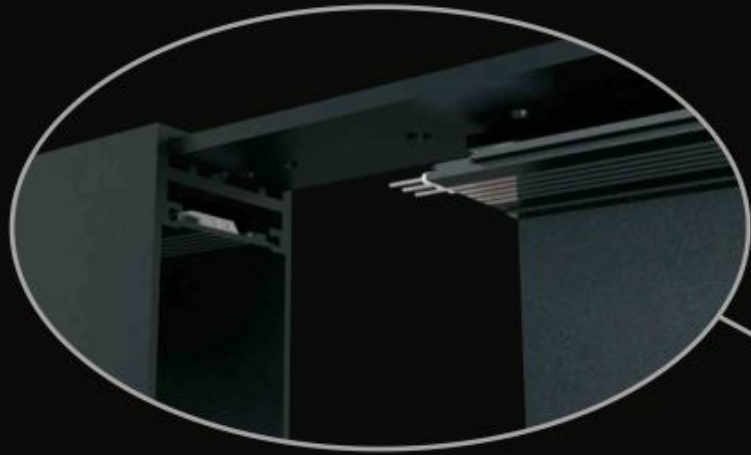



STANDARD

series



- Recessed



- Surface
- Pendant
- Recessed



- TrackS-A**
- Surface
 - Pendant
 - Recessed
- US standard  


Connector

Input terminal




Model	Power	Install	Length
1 Meter profile	200W max	Surface/Pendant/Recessed	1000mm
2 Meter profile	200W max	Surface/Pendant/Recessed	2000mm
3 Meter profile	200W max	Surface/Pendant/Recessed	3000mm

■ Sandy Black □ Sandy White ■ Goblet ■ Black bronze



Model	Power	Install	Length
1 Meter profile	200W max	Recessed	1000mm
2 Meter profile	200W max	Recessed	2000mm
3 Meter profile	200W max	Recessed	3000mm

■ Sandy Black □ Sandy White ■ Goblet ■ Black bronze



CORNER

L Corner

■ Sandy Black □ Sandy White



Inner Corner

■ Sandy Black □ Sandy White



Outer Corner

■ Sandy Black □ Sandy White



T corner

■ Sandy Black □ Sandy White



45D corner

■ Sandy Black □ Sandy White



CROSS corner

■ Sandy Black □ Sandy White



CORNER

L Corner-R

■ Sandy Black □ Sandy White



Inner Corner-R

■ Sandy Black □ Sandy White



Outer Corner-R

■ Sandy Black □ Sandy White



T Corner-R

■ Sandy Black □ Sandy White



POWER FEED

Input terminal

■ Sandy Black □ Sandy White



POWER FEED

Input terminal-R

■ Sandy Black □ Sandy White



ACCESSORIES

Recessed kit



Pendant kit-A




Pendant kit-B



Track connector



Power plate 65mm



New surface mounted kits



Track cover



Track driver box



Driver box




End cap



Pin2



Pin3



DOT01




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
2W	> 80	< 3	2700K	12°	120Lm
	> 90		3000K	34°	
			4000K	48°	

■ Sandy Black □ Sandy White

LIGHT DISTRIBUITION

3000K 80Ra

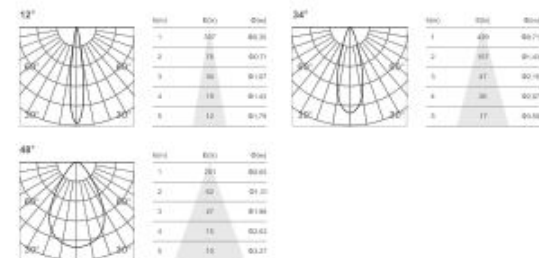

DOT03




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
4W	> 80	< 3	2700K	12°	380Lm
	> 90		3000K	34°	
			4000K	48°	

■ Sandy Black □ Sandy White

LIGHT DISTRIBUITION

3000K 80Ra

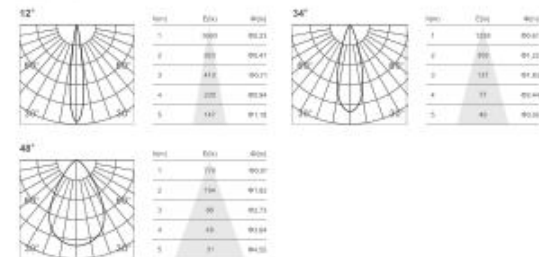



DOT06





POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
8W	> 80	< 3	2700K	12°	790Lm
	> 90		3000K	34°	
			4000K	48°	

■ Sandy Black □ Sandy White

LIGHT DISTRIBUITION

3000K 80Ra

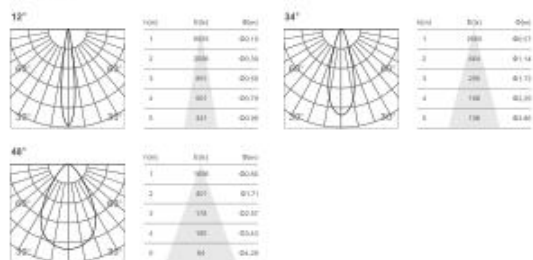

DOT12




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
16W	> 80	< 3	2700K	12°	1550Lm
	> 90		3000K	34°	
			4000K	48°	

■ Sandy Black □ Sandy White

LIGHT DISTRIBUITION

3000K 80Ra

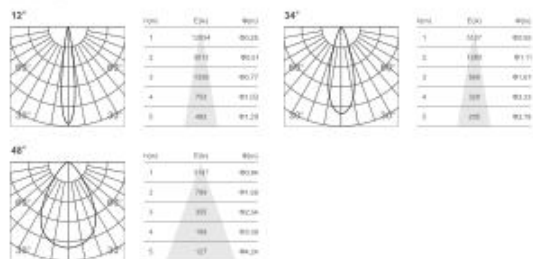

Linear08




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
4W	> 80	< 3	2700K	Diffuse	280Lm
	> 90		3000K		
			4000K		

■ Sandy Black □ Sandy White

LIGHT DISTRIBUITION

3000K 80Ra



Linear16




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
7W	> 80	< 3	2700K	Diffuse	500Lm
	> 90		3000K		
			4000K		

■ Sandy Black □ Sandy White

LIGHT DISTRIBUITION

3000K 80Ra





Linear32




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
13W	> 80	< 3	2700K	Diffuse	980Lm
	> 90		3000K		
			4000K		

■ Sandy Black □ Sandy White

LIGHT DISTRIBUITION

3000K 80Ra

Diffuse



Beam	Beam	Beam
1	48°	81.11
2	10°	84.30
3	47°	87.51
4	30°	89.94
5	17°	91.88



Linear96




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
39W	> 80	< 3	2700K	Diffuse	2850Lm
	> 90		3000K		
			4000K		

■ Sandy Black □ Sandy White

LIGHT DISTRIBUITION

3000K 80Ra

Diffuse



Beam	Beam	Beam
1	48°	81.21
2	10°	84.40
3	47°	87.61
4	30°	89.94
5	17°	91.88



Linear64



POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
26W	> 80	< 3	2700K	Diffuse	1900Lm
	> 90		3000K		
			4000K		

■ Sandy Black □ Sandy White

LIGHT DISTRIBUITION

3000K 80Ra

Diffuse



Beam	Beam	Beam
1	48°	80.66
2	10°	83.85
3	47°	87.06
4	30°	89.49
5	17°	91.43





Fold03




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
4W	> 80	< 3	2700K	12°	380Lm
	> 90		3000K	34°	
			4000K	48°	

■ Sandy Black □ Sandy White

LIGHT DISTRIBUITION

3000K 80Ra

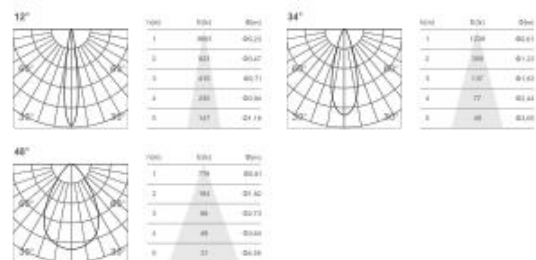

Fold12





POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
16W	> 80	< 3	2700K	12°	1550Lm
	> 90		3000K	34°	
			4000K	48°	

■ Sandy Black □ Sandy White

LIGHT DISTRIBUITION

3000K 80Ra

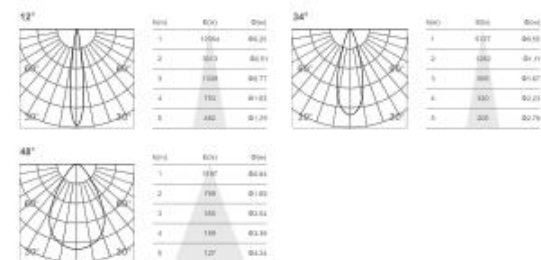

Fold06





POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
8W	> 80	< 3	2700K	12°	790Lm
	> 90		3000K	34°	
			4000K	48°	

■ Sandy Black □ Sandy White

LIGHT DISTRIBUITION

3000K 80Ra

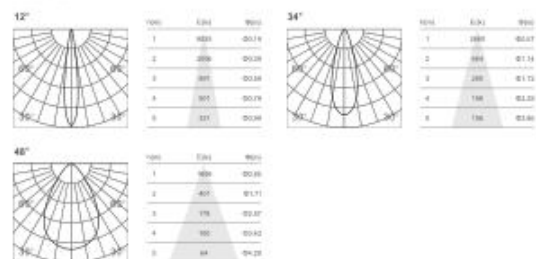



Fold08





POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
4W	> 80	< 3	2700K	Diffuse	280Lm
	> 90		3000K		
			4000K		

■ Sandy Black □ Sandy White

LIGHT DISTRIBUITION

3000K 80Ra



Fold32




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
16W	> 80	< 3	2700K	Diffuse	980Lm
	> 90		3000K		
			4000K		

■ Sandy Black □ Sandy White

LIGHT DISTRIBUITION

3000K 80Ra



Fold16






POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
8W	> 80	< 3	2700K	Diffuse	500Lm
	> 90		3000K		
			4000K		

■ Sandy Black □ Sandy White

LIGHT DISTRIBUITION

3000K 80Ra

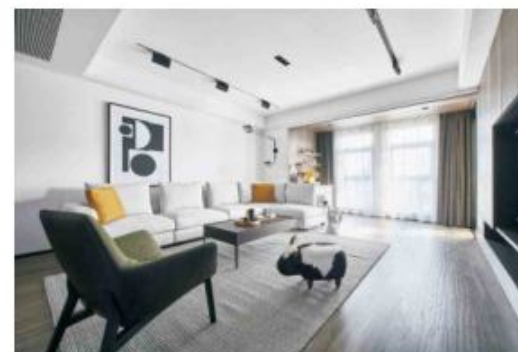



Washer13



POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
8W	> 80	< 3	2700K	wallwasher	380Lm
	> 90		3000K		
			4000K		

■ Sandy Black □ Sandy White

LIGHT DISTRIBUITION

3000K 80Ra



Beam	Beam	Beam
1	12°	80.25
2	18°	81.36
3	24°	82.11
4	30°	82.58
5	36°	82.88



Out32




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
13W	> 80	< 3	2700K	Diffuse	980Lm
	> 90		3000K		
			4000K		

■ Sandy Black □ Sandy White

LIGHT DISTRIBUITION

3000K 80Ra



Beam	Beam	Beam
1	60°	82.11
2	120°	82.00
3	180°	82.00
4	240°	82.00
5	300°	82.00



Washer27



POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
16W	> 80	< 3	2700K	wallwasher	880Lm
	> 90		3000K		
			4000K		

■ Sandy Black □ Sandy White

LIGHT DISTRIBUITION

3000K 80Ra



Beam	Beam	Beam
1	12°	81.26
2	18°	81.80
3	24°	82.10
4	30°	82.28
5	36°	82.40



Out12




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
16W	> 80	< 3	2700K	12°	1550Lm
	> 90		3000K	34°	
			4000K	48°	


■ Sandy Black □ Sandy White

LIGHT DISTRIBUITION


3000K 80Ra



Beam	Beam	Beam
1	120°	82.26
2	150°	82.21
3	180°	82.11
4	210°	81.83
5	240°	81.23



Beam	Beam	Beam
1	100°	82.26
2	130°	82.11
3	160°	81.87
4	190°	81.21
5	220°	80.78



Beam	Beam	Beam
1	100°	82.24
2	130°	81.80
3	160°	81.24
4	190°	80.58
5	220°	80.24



ADAPTERS

3 Adapters

Same spotlight heads + 3 kinds of adapters = 3 different system



Spot



Pendant





Spot35





POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
5W	> 80	< 3	2700K	20°	440Lm
	> 90		3000K	30°	
			4000K	40°	
			60°		

■ Sandy Black ■ Sandy White ■ Golden

LIGHT DISTRIBUION

3000K 80Ra

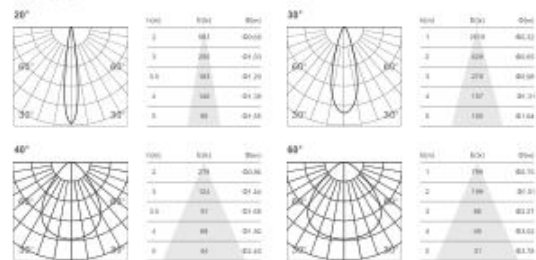

Spot35-T





POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
2x5W	> 80	< 3	2700K	20°	880Lm
	> 90		3000K	30°	
			4000K	40°	
			60°		

■ Sandy Black ■ Sandy White ■ Golden

LIGHT DISTRIBUION

3000K 80Ra

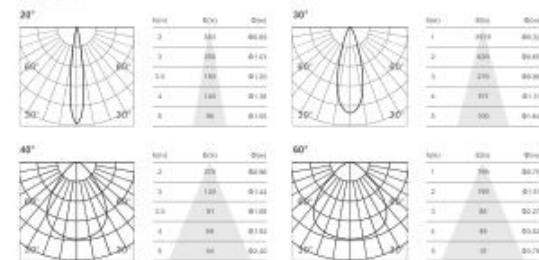



Spot50




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
10W	> 80	< 3	2700K	18°	780Lm
	> 90		3000K	24°	
			4000K	36°	


■ Sandy Black □ Sandy White ■ Golden

LIGHT DISTRIBUTION


3000K 80Ra



h(m)	R(m)	D(m)
1	0.31	0.48
2	0.62	0.96
3	0.93	1.44
4	1.24	1.92
5	1.55	2.40




h(m)	R(m)	D(m)
1	0.41	0.64
2	0.82	1.28
3	1.23	1.92
4	1.64	2.56
5	2.05	3.20




h(m)	R(m)	D(m)
1	0.56	0.84
2	1.12	1.68
3	1.68	2.52
4	2.24	3.36
5	2.80	4.20



STANDARD



MINI



CURVY



Spot65-R




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
8W	> 80	< 3	2700K	10°	405Lm
	> 90		3000K	20°	
			4000K	30°	

■ Sandy Black □ Sandy White

LIGHT DISTRIBUITION

3000K 80Ra

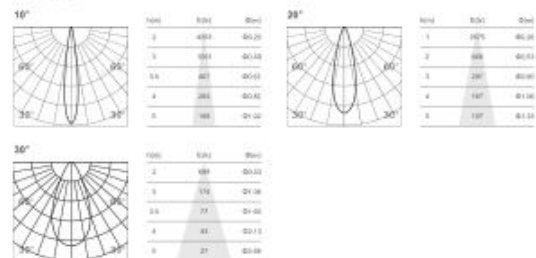

Spot92-R





POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
15W	> 80	< 3	2700K	10°	905Lm
	> 90		3000K	20°	
			4000K	30°	

■ Sandy Black □ Sandy White

LIGHT DISTRIBUITION

3000K 80Ra

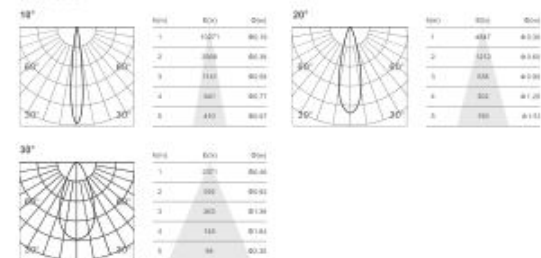



Spot50-S





POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
10W	> 80	< 3	2700K	15°	600Lm
	> 90		3000K	24°	
			4000K	36°	

■ Sandy Black □ Sandy White

LIGHT DISTRIBUION

3000K 80Ra

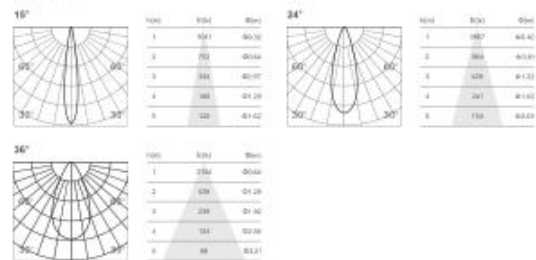

Spot70






POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
20W	> 80	< 3	2700K	15°	1450Lm
	> 90		3000K	24°	
			4000K	36°	

■ Sandy Black □ Sandy White


LIGHT DISTRIBUION

3000K 80Ra

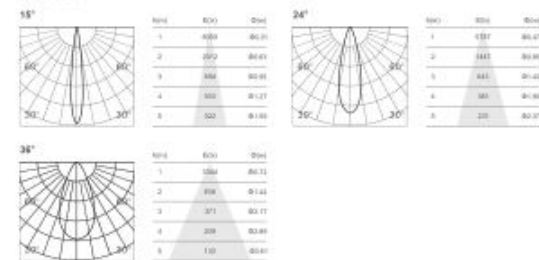




Halo spot



Halo linear






Halo-D18




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
18W	> 80	< 3	2700K	24°	1750Lm
	> 90		3000K	34°	
			4000K	48°	


■ Sandy Black □ Sandy White



STANDARD



MINI



CURVY




Halo-L16




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
18W	> 80	< 3	2700K	Diffuse	950Lm
	> 90		3000K		
			4000K		


■ Sandy Black □ Sandy White



STANDARD



MINI



CURVY




Halo-D12




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
12W	> 80	< 3	2700K	24°	1150Lm
	> 90		3000K	34°	
			4000K	48°	


■ Sandy Black □ Sandy White



STANDARD



MINI



CURVY




Halo-L12




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
12W	> 80	< 3	2700K	Diffuse	650Lm
	> 90		3000K		
			4000K		


■ Sandy Black □ Sandy White



STANDARD



MINI



CURVY

ADAPTERS | Pendant series





Pendant35-R





POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
5W	> 80	< 3	2700K	20°	440Lm
	> 90		3000K	30°	
			4000K	40°	
			60°		

■ Sandy Black ■ Sandy White ■ Golden ■ Black bronze

LIGHT DISTRIBUTION

3000K 80Ra

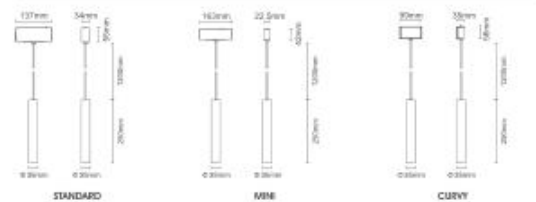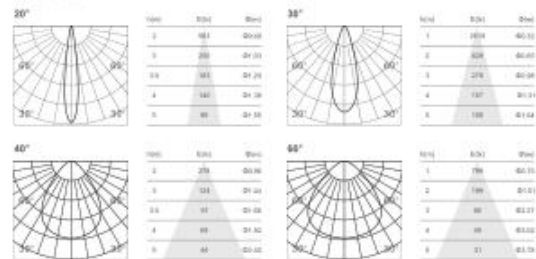

Pendant50-R





POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
10W	> 80	< 3	2700K	18°	780Lm
	> 90		3000K	24°	
			4000K	36°	

■ Sandy Black ■ Sandy White ■ Golden ■ Black bronze

LIGHT DISTRIBUTION

3000K 80Ra

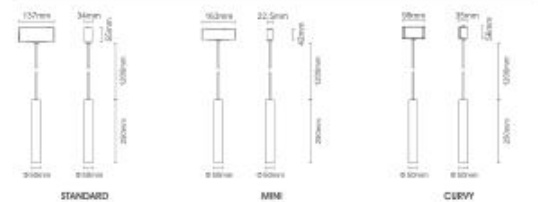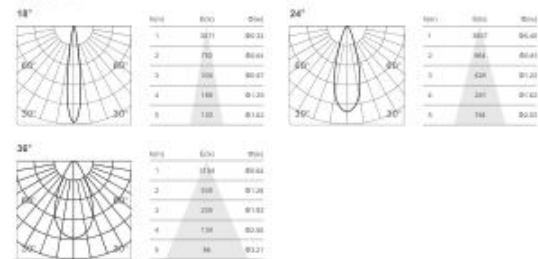



Pendant-glory




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
10W	> 80 > 90	< 3	2700K 3000K 4000K	Diffuse	480Lm

■ Sandy Black □ Sandy White

LIGHT DISTRIBUTION

3000K 60Ra

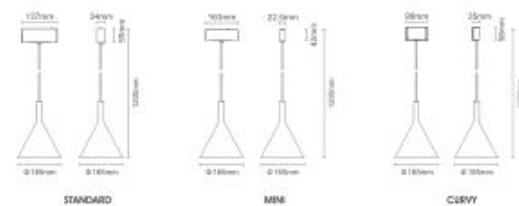



Pendant-global





POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
5W	> 80	< 3	2700K	Diffuse	290Lm
	> 90		3000K		
			4000K		

■ Sandy Black □ Sandy White

LIGHT DISTRIBUITION

2700K 80Ra

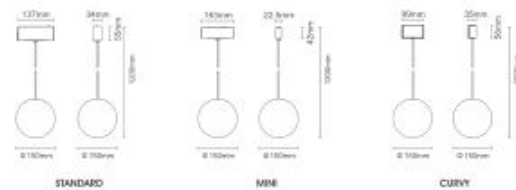

Global





POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
5W	> 80	< 3	2700K	Diffuse	290Lm
	> 90		3000K		
			4000K		

■ Sandy Black □ Sandy White

LIGHT DISTRIBUITION

2700K 80Ra

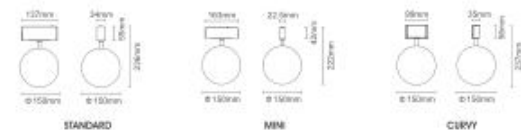



MINI series



- Surface
- Pendant
- Recessed




- Recessed




Model	Power	Install	Length
1 Meter profile-s	200W max	Surface/Pendant/Recessed	1000mm
2 Meter profile-s	200W max	Surface/Pendant/Recessed	2000mm
3 Meter profile-s	200W max	Surface/Pendant/Recessed	3000mm

■ Sandy Black ■ Sandy White ■ Golden ■ Black bronze



Model	Power	Install	Length
1 Meter profile-s	200W max	Recessed	1000mm
2 Meter profile-s	200W max	Recessed	2000mm
3 Meter profile-s	200W max	Recessed	3000mm

■ Sandy Black ■ Sandy White ■ Golden ■ Black bronze



CORNER

L corner-s

■ Sandy Black ■ Sandy White



Inner corner-s

■ Sandy Black ■ Sandy White



Outer corner-s

■ Sandy Black ■ Sandy White



T corner-s

■ Sandy Black ■ Sandy White



45D corner-s

■ Sandy Black ■ Sandy White



Cross corner-s

■ Sandy Black ■ Sandy White



CORNER

L corner-R-s

■ Sandy Black ■ Sandy White



Inner corner-R-s

■ Sandy Black ■ Sandy White



Outer corner-R-s

■ Sandy Black ■ Sandy White





Dot06-s




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
6W	> 80	< 3	2700K	18°	650Lm
	> 90		3000K	34°	
			4000K	48°	

■ Sandy Black □ Sandy White

LIGHT DISTRIBUITION

3000K 80Ra

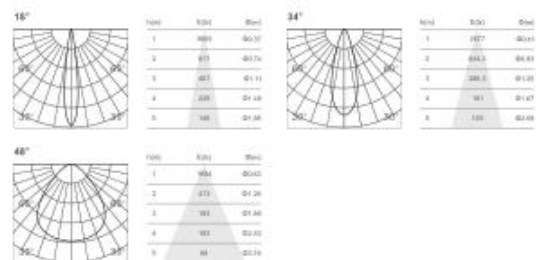

Dot24-s






POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
24W	> 80	< 3	2700K	18°	2400Lm
	> 90		3000K	34°	
			4000K	48°	

■ Sandy Black □ Sandy White

LIGHT DISTRIBUITION

3000K 80Ra

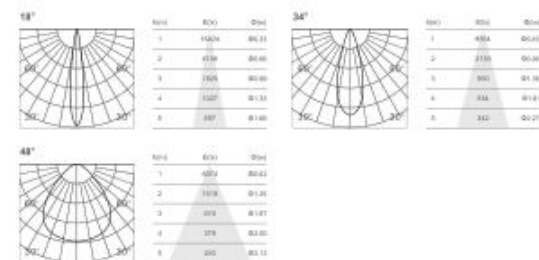

Dot12-s





POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
12W	> 80	< 3	2700K	18°	1150Lm
	> 90		3000K	34°	
			4000K	48°	

■ Sandy Black □ Sandy White

LIGHT DISTRIBUITION

3000K 80Ra

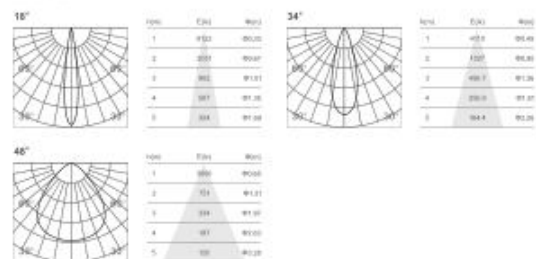



Linear20-s




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
8W	> 80	< 3	2700K	Diffuse	460Lm
	> 90		3000K		
			4000K		

■ Sandy Black □ Sandy White

LIGHT DISTRIBUITION

3000K 80Ra

Diffuse



Beam	Beam	Beam
1	20	42.38
2	41	80.81
3	58	87.58
4	74	87.00
5	8	87.58



Linear40-s




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
15W	> 80	< 3	2700K	Diffuse	900Lm
	> 90		3000K		
			4000K		

■ Sandy Black □ Sandy White

LIGHT DISTRIBUITION

3000K 80Ra

Diffuse



Beam	Beam	Beam
1	39.7	82.71
2	79.2	82.21
3	92.8	86.28
4	124	90.47
5	14.8	87.02



Linear80-s




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
30W	> 80	< 3	2700K	Diffuse	1800Lm
	> 90		3000K		
			4000K		

■ Sandy Black □ Sandy White

LIGHT DISTRIBUITION

3000K 80Ra

Diffuse



Beam	Beam	Beam
1	79.2	80.22
2	158.4	84.44
3	185.6	86.88
4	247.7	88.88
5	29.8	87.12





Fold06-s





POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
8W	> 80	< 3	2700K	18°	650Lm
	> 90		3000K	34°	
			4000K	48°	

■ Sandy Black □ Sandy White

LIGHT DISTRIBUITION

3000K 80Ra

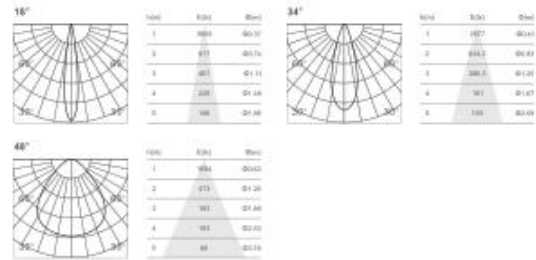

Fold10-s





POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
8W	> 80	< 3	2700K	Diffuse	460Lm
	> 90		3000K		
			4000K		

■ Sandy Black □ Sandy White

LIGHT DISTRIBUITION

3000K 80Ra



Fold12-s




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX	
16W	> 80	< 3	2700K	18°	1150Lm	
	> 90		3000K			34°
			4000K			48°

■ Sandy Black □ Sandy White

LIGHT DISTRIBUITION

3000K 80Ra

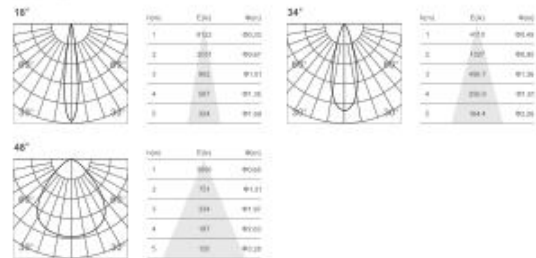

Fold20-s




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
16W	> 80	< 3	2700K	Diffuse	900Lm
	> 90		3000K		
			4000K		

■ Sandy Black □ Sandy White

LIGHT DISTRIBUITION

3000K 80Ra





Surface



Pendant



Recessed

CURVY MAGNETIC SYSTEM

With the brand new track addition
The curvy system bring you more inspiration

Black White Golden Black bronze



Full



1/2



1/4



1/8



Creative design



Creative design



Creative design




Curvy Full-D9



Power Install

200W max Surface/Pendant/Recessed

■ Sandy Black ■ Sandy White ■ Golden ■ Black bronze



Curvy 1/4-D9



Power Install

200W max Surface/Pendant/Recessed

■ Sandy Black ■ Sandy White ■ Golden ■ Black bronze




Curvy 1/2-D9



Power Install

200W max Surface/Pendant/Recessed

■ Sandy Black ■ Sandy White ■ Golden ■ Black bronze





Curvy 1/8-D9



Power Install

200W max Surface/Pendant/Recessed

■ Sandy Black ■ Sandy White ■ Golden ■ Black bronze





Dot03-D9





POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
4W	> 80	< 3	2700K	12°	380Lm
	> 90		3000K	34°	
			4000K	48°	

■ Sandy Black □ Sandy White

LIGHT DISTRIBUITION

3000K 80Ra

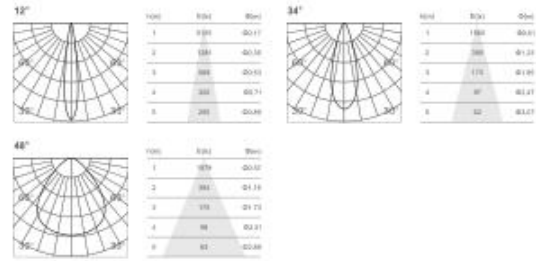

Dot06-D9





POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
8W	> 80	< 3	2700K	12°	790Lm
	> 90		3000K	34°	
			4000K	48°	

■ Sandy Black □ Sandy White

LIGHT DISTRIBUITION

3000K 80Ra

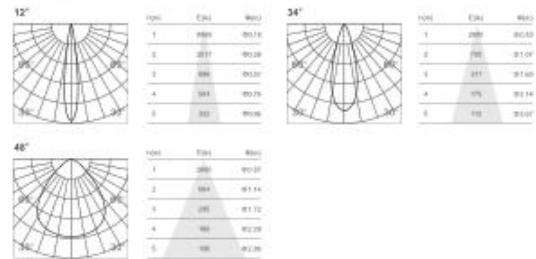

Linear16-D9





POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
8W	> 80	< 3	2700K	Diffuse	500Lm
	> 90		3000K		
			4000K		

■ Sandy Black □ Sandy White

LIGHT DISTRIBUITION

3000K 80Ra



ACCESSORIES

Recessed kit-R

■ Sandy Black □ Sandy White

Recessed kit for full curvy track.

