


# Lighting Application and Product Manual 2024



# SuperMini Series

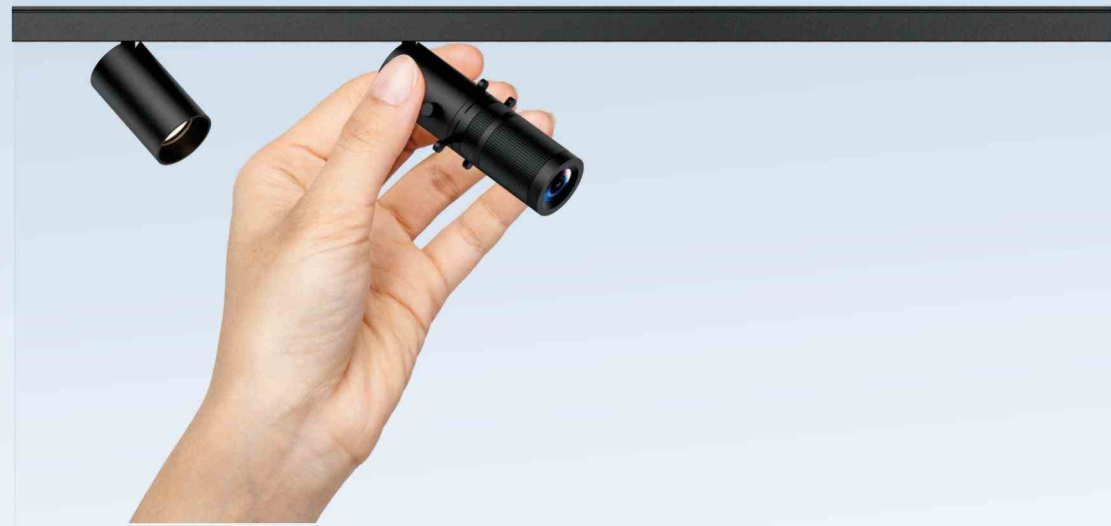



**Diameter 23mm**  
Super mini, exquisitely compact

**Cabinet Precise Lighting**  
Focus on highlighting the exhibits

jewelry | luxuries | museum | gallery





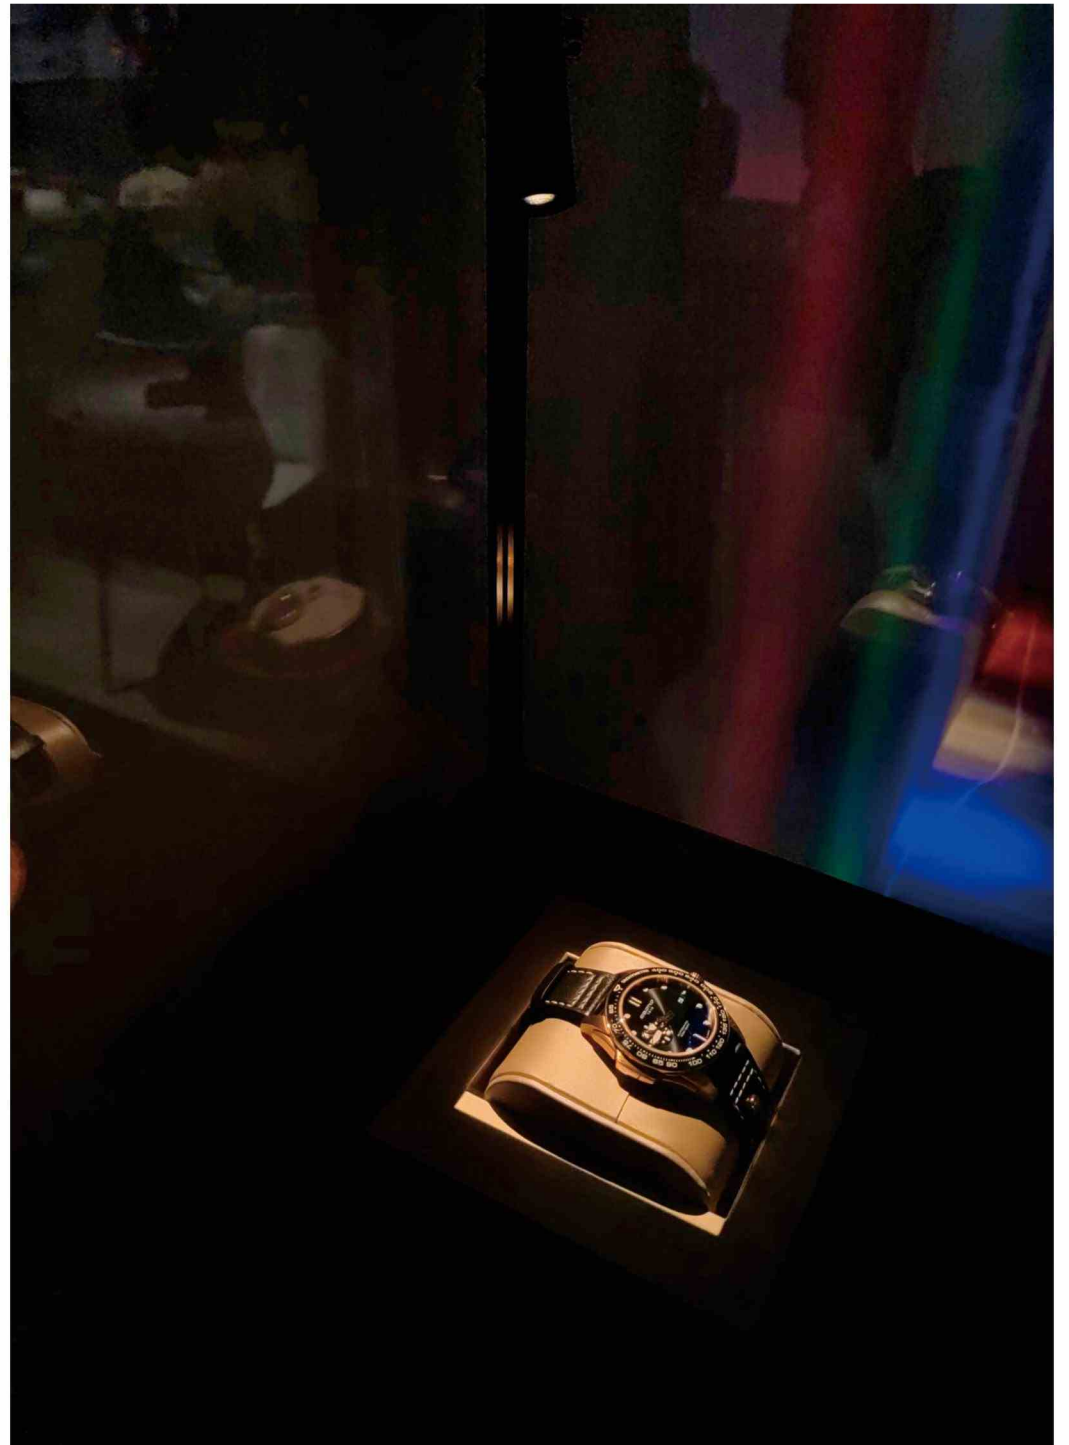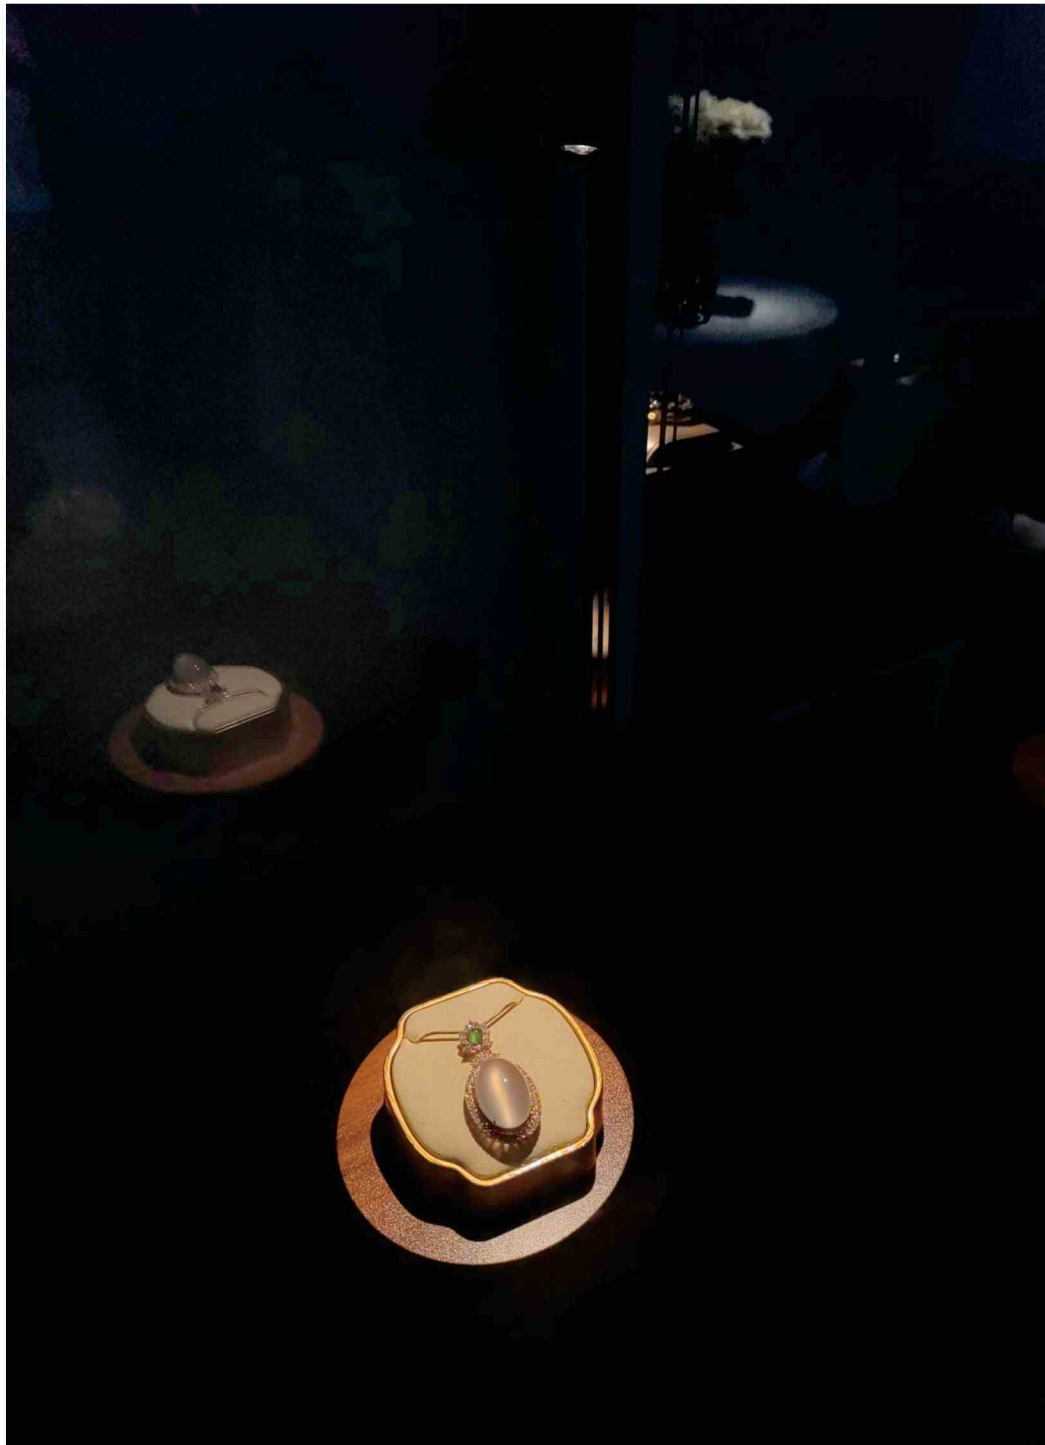

## SuperMini Series —SD18-Spotlight

	<b>Model No.</b>	SD18-S
	<b>Power</b>	1W
	<b>CCT</b>	2700K/3000K/3500K/4000K
	<b>CRI</b>	Ra≥97
	<b>Color</b>	Black/White

<b>Sign</b>	
-------------	--

<b>Installation Way</b>	<b>Installation Category</b>	<b>Product Picture</b>	<b>Input Voltage</b>	<b>Control Way</b>
	MT10 Track		DC 24V	Dimming-Onboard
	STUCCHI Track		DC 48V	DALI/CASAMBI
	Surface Mounted		AC 100-240V 50/60Hz	NO Dimming
	Recessed		AC 100-240V 50/60Hz	NO Dimming

<b>CCT</b>	4000K
------------	-------

<b>CRI</b>	Ra97
------------	------

<b>Beam Angle</b>	25°
-------------------	-----

<b>Luminous Flux</b>	103.27lm(Ra97)
----------------------	----------------

<b>Light Distribution</b>			
	H(m)	E(lx)	D(m)
	1	375	0.45
	2	94	0.90
	3	42	1.34
	4	23	1.79
	5	15	2.24

## SuperMini Series —SD23-Spotlight

	<b>Model No.</b>	SD23-S
	<b>Power</b>	3W
	<b>CCT</b>	2700K/3000K/3500K/4000K
	<b>CRI</b>	Ra≥97
	<b>Color</b>	Black/White

<b>Sign</b>	
-------------	--

<b>Installation Way</b>	<b>Installation Category</b>	<b>Product Picture</b>	<b>Input Voltage</b>	<b>Control Way</b>
	MT10 Track		DC 24V	Dimming-Onboard
	STUCCHI Track		DC 48V	DALI/CASAMBI
	Surface Mounted		AC 100-240V 50/60Hz	NO Dimming
	Recessed		AC 100-240V 50/60Hz	NO Dimming

<b>CCT</b>	4000K
------------	-------

<b>CRI</b>	Ra97
------------	------

<b>Beam Angle</b>	15°	25°	35°	45°
-------------------	-----	-----	-----	-----

<b>Luminous Flux</b>	146.59lm(Ra97)	187.32lm(Ra97)	183.87lm(Ra97)	175.56lm(Ra97)
----------------------	----------------	----------------	----------------	----------------

<b>Light Distribution</b>												
	H(m)	E(lx)	D(m)	H(m)	E(lx)	D(m)	H(m)	E(lx)	D(m)	H(m)	E(lx)	D(m)
	1	763	0.33	1	545	0.48	1	394	0.51	1	182	0.85
	2	191	0.66	2	136	0.95	2	98	1.02	2	46	1.69
	3	85	0.99	3	61	1.43	3	44	1.53	3	20	2.54
	4	48	1.32	4	34	1.90	4	25	2.04	4	11	3.39
	5	31	1.65	5	22	2.38	5	16	2.55	5	7	4.24

# SuperMini Series

## —SD23-Zoom Spotlight

		<b>Model No.</b>	SD23-Z																																					
		<b>Power</b>	3W																																					
		<b>CCT</b>	2700K/3000K/3500K/4000K																																					
		<b>CRI</b>	Ra≥97																																					
		<b>Color</b>	Black/White																																					
<b>Sign</b>																																								
<b>Installation Way</b>	<b>Installation Category</b>	<b>Product Picture</b>	<b>Input Voltage</b>	<b>Control Way</b>																																				
	MT10 Track		DC 24V	Dimming-Onboard																																				
	STUCCHI Track		DC 48V	DALI/CASAMBI																																				
	Surface Mounted		AC 100-240V 50/60Hz	NO Dimming																																				
	Recessed		AC 100-240V 50/60Hz	NO Dimming																																				
<b>CCT</b>	4000K																																							
<b>CRI</b>	Ra97																																							
<b>Beam Angle</b>	10°		40°																																					
<b>Luminous Flux</b>	92.575lm(Ra97)		130.34lm(Ra97)																																					
<b>Light Distribution</b>	<table border="1"> <thead> <tr> <th>H(m)</th> <th>E(lx)</th> <th>D(m)</th> </tr> </thead> <tbody> <tr><td>1</td><td>854</td><td>0.24</td></tr> <tr><td>2</td><td>214</td><td>0.47</td></tr> <tr><td>3</td><td>95</td><td>0.71</td></tr> <tr><td>4</td><td>53</td><td>0.94</td></tr> <tr><td>5</td><td>34</td><td>1.18</td></tr> </tbody> </table>		H(m)	E(lx)	D(m)	1	854	0.24	2	214	0.47	3	95	0.71	4	53	0.94	5	34	1.18	<table border="1"> <thead> <tr> <th>H(m)</th> <th>E(lx)</th> <th>D(m)</th> </tr> </thead> <tbody> <tr><td>1</td><td>321</td><td>0.56</td></tr> <tr><td>2</td><td>80</td><td>1.11</td></tr> <tr><td>3</td><td>36</td><td>1.67</td></tr> <tr><td>4</td><td>20</td><td>2.23</td></tr> <tr><td>5</td><td>13</td><td>2.78</td></tr> </tbody> </table>		H(m)	E(lx)	D(m)	1	321	0.56	2	80	1.11	3	36	1.67	4	20	2.23	5	13	2.78
	H(m)	E(lx)	D(m)																																					
1	854	0.24																																						
2	214	0.47																																						
3	95	0.71																																						
4	53	0.94																																						
5	34	1.18																																						
H(m)	E(lx)	D(m)																																						
1	321	0.56																																						
2	80	1.11																																						
3	36	1.67																																						
4	20	2.23																																						
5	13	2.78																																						

# SuperMini Series

## —VF2303-Zoomable Framing Gobo Light

		<b>Model No.</b>	VF2303-1835																																					
		<b>Power</b>	3W																																					
		<b>CCT</b>	2700K/3000K/3500K/4000K																																					
		<b>CRI</b>	Ra≥97																																					
		<b>Color</b>	Black/White																																					
<b>Sign</b>																																								
<b>Installation Way</b>	<b>Installation Category</b>	<b>Product Picture</b>	<b>Input Voltage</b>	<b>Control Way</b>																																				
	MT10 Track		DC 24V	Dimming-Onboard																																				
	STUCCHI Track		DC 48V	DALI/CASAMBI																																				
	Surface Mounted		AC 100-240V 50/60Hz	NO Dimming																																				
	Recessed		AC 100-240V 50/60Hz	NO Dimming																																				
<b>CCT</b>	4000K																																							
<b>CRI</b>	Ra97																																							
<b>Beam Angle</b>	18°		35°																																					
	<b>Luminous Flux</b>		<b>Luminous Flux</b>																																					
<b>Light Distribution</b>	<table border="1"> <thead> <tr> <th>H(m)</th> <th>E(lx)</th> <th>D(m)</th> </tr> </thead> <tbody> <tr><td>1</td><td>428</td><td>0.30</td></tr> <tr><td>2</td><td>107</td><td>0.61</td></tr> <tr><td>3</td><td>48</td><td>0.91</td></tr> <tr><td>4</td><td>27</td><td>1.21</td></tr> <tr><td>5</td><td>17</td><td>1.52</td></tr> </tbody> </table>		H(m)	E(lx)	D(m)	1	428	0.30	2	107	0.61	3	48	0.91	4	27	1.21	5	17	1.52	<table border="1"> <thead> <tr> <th>H(m)</th> <th>E(lx)</th> <th>D(m)</th> </tr> </thead> <tbody> <tr><td>1</td><td>112</td><td>0.65</td></tr> <tr><td>2</td><td>28</td><td>1.29</td></tr> <tr><td>3</td><td>12</td><td>1.94</td></tr> <tr><td>4</td><td>7</td><td>2.58</td></tr> <tr><td>5</td><td>4</td><td>3.23</td></tr> </tbody> </table>		H(m)	E(lx)	D(m)	1	112	0.65	2	28	1.29	3	12	1.94	4	7	2.58	5	4	3.23
	H(m)	E(lx)	D(m)																																					
1	428	0.30																																						
2	107	0.61																																						
3	48	0.91																																						
4	27	1.21																																						
5	17	1.52																																						
H(m)	E(lx)	D(m)																																						
1	112	0.65																																						
2	28	1.29																																						
3	12	1.94																																						
4	7	2.58																																						
5	4	3.23																																						

# All New **Magic One** Series



The same light source body can be matched with different optical components such as fixed lens, zoom lens, and framing . At the same time, various optical accessories can be arbitrarily superimposed to achieve flexible, diverse, and easy personalized combinations, fully meeting the lighting needs of different customers for various scenarios. In particular, it can meet the small-batch and diverse customization needs of customers.

















































































# Magic One Series

## —M3

 		<b>Model No.</b> M3 <b>Power</b> 10W <b>CCT</b> 2700K/3000K/3500K/4000K 2700~5700K <b>CRI</b> ON/OFF≥97 CCT Adjustable≥90 <b>Voltage</b> DC 48V AC220-240V~50/60Hz <b>Color</b> Black/White																																																																																												
<b>Compatible Adapters</b>     	<b>Control Way</b> Dimming-Onboard/0-10V DALI/DMX/CASAMBI/ZIGBEE Bluetooth																																																																																													
<b>Sign</b>      																																																																																														
<b>Class 1 Optical Accessories</b>    																																																																																														
<b>Class 2 Optical Accessories</b>        																																																																																														
<b>Class 3 Optical Accessories</b>   																																																																																														
<b>CCT</b> 4000K <b>CRI</b> Ra97																																																																																														
<b>Beam Angle</b> Fix Module-15°    Fix Module-20°    Fix Module-30°    Fix Module-45°    Zoom Module-10°																																																																																														
<b>Luminous Flux</b> 675.49lm    796.88lm    793.86lm    714.56lm    504.36lm																																																																																														
<b>Light Distribution</b>     																																																																																														
<table border="1"> <thead> <tr> <th>H(m)</th> <th>E(lx)</th> <th>D(m)</th> </tr> </thead> <tbody> <tr><td>1</td><td>6463</td><td>0.25</td></tr> <tr><td>2</td><td>1616</td><td>0.50</td></tr> <tr><td>3</td><td>718</td><td>0.74</td></tr> <tr><td>4</td><td>404</td><td>0.99</td></tr> <tr><td>5</td><td>259</td><td>1.24</td></tr> </tbody> </table>	H(m)	E(lx)	D(m)	1	6463	0.25	2	1616	0.50	3	718	0.74	4	404	0.99	5	259	1.24	<table border="1"> <thead> <tr> <th>H(m)</th> <th>E(lx)</th> <th>D(m)</th> </tr> </thead> <tbody> <tr><td>1</td><td>5250</td><td>0.32</td></tr> <tr><td>2</td><td>1313</td><td>0.64</td></tr> <tr><td>3</td><td>583</td><td>0.96</td></tr> <tr><td>4</td><td>328</td><td>1.29</td></tr> <tr><td>5</td><td>210</td><td>1.61</td></tr> </tbody> </table>	H(m)	E(lx)	D(m)	1	5250	0.32	2	1313	0.64	3	583	0.96	4	328	1.29	5	210	1.61	<table border="1"> <thead> <tr> <th>H(m)</th> <th>E(lx)</th> <th>D(m)</th> </tr> </thead> <tbody> <tr><td>1</td><td>2392</td><td>0.49</td></tr> <tr><td>2</td><td>598</td><td>0.99</td></tr> <tr><td>3</td><td>266</td><td>1.48</td></tr> <tr><td>4</td><td>150</td><td>1.98</td></tr> <tr><td>5</td><td>96</td><td>2.47</td></tr> </tbody> </table>	H(m)	E(lx)	D(m)	1	2392	0.49	2	598	0.99	3	266	1.48	4	150	1.98	5	96	2.47	<table border="1"> <thead> <tr> <th>H(m)</th> <th>E(lx)</th> <th>D(m)</th> </tr> </thead> <tbody> <tr><td>1</td><td>823</td><td>0.84</td></tr> <tr><td>2</td><td>206</td><td>1.68</td></tr> <tr><td>3</td><td>91</td><td>2.51</td></tr> <tr><td>4</td><td>51</td><td>3.35</td></tr> <tr><td>5</td><td>33</td><td>4.19</td></tr> </tbody> </table>	H(m)	E(lx)	D(m)	1	823	0.84	2	206	1.68	3	91	2.51	4	51	3.35	5	33	4.19	<table border="1"> <thead> <tr> <th>H(m)</th> <th>E(lx)</th> <th>D(m)</th> </tr> </thead> <tbody> <tr><td>1</td><td>7979</td><td>0.18</td></tr> <tr><td>2</td><td>1995</td><td>0.35</td></tr> <tr><td>3</td><td>887</td><td>0.53</td></tr> <tr><td>4</td><td>499</td><td>0.71</td></tr> <tr><td>5</td><td>319</td><td>0.89</td></tr> </tbody> </table>	H(m)	E(lx)	D(m)	1	7979	0.18	2	1995	0.35	3	887	0.53	4	499	0.71	5	319	0.89
H(m)	E(lx)	D(m)																																																																																												
1	6463	0.25																																																																																												
2	1616	0.50																																																																																												
3	718	0.74																																																																																												
4	404	0.99																																																																																												
5	259	1.24																																																																																												
H(m)	E(lx)	D(m)																																																																																												
1	5250	0.32																																																																																												
2	1313	0.64																																																																																												
3	583	0.96																																																																																												
4	328	1.29																																																																																												
5	210	1.61																																																																																												
H(m)	E(lx)	D(m)																																																																																												
1	2392	0.49																																																																																												
2	598	0.99																																																																																												
3	266	1.48																																																																																												
4	150	1.98																																																																																												
5	96	2.47																																																																																												
H(m)	E(lx)	D(m)																																																																																												
1	823	0.84																																																																																												
2	206	1.68																																																																																												
3	91	2.51																																																																																												
4	51	3.35																																																																																												
5	33	4.19																																																																																												
H(m)	E(lx)	D(m)																																																																																												
1	7979	0.18																																																																																												
2	1995	0.35																																																																																												
3	887	0.53																																																																																												
4	499	0.71																																																																																												
5	319	0.89																																																																																												
<b>Beam Angle</b> Zoom Module-50°    Framing Zoom-20°    Framing Zoom-35°    Framing Fix-55°																																																																																														
<b>Luminous Flux</b> 656.44lm    392.72lm    391.33lm    313.69lm																																																																																														
<b>Light Distribution</b>    																																																																																														
<table border="1"> <thead> <tr> <th>H(m)</th> <th>E(lx)</th> <th>D(m)</th> </tr> </thead> <tbody> <tr><td>1</td><td>786</td><td>0.91</td></tr> <tr><td>2</td><td>197</td><td>1.81</td></tr> <tr><td>3</td><td>87</td><td>2.72</td></tr> <tr><td>4</td><td>49</td><td>3.63</td></tr> <tr><td>5</td><td>31</td><td>4.54</td></tr> </tbody> </table>	H(m)	E(lx)	D(m)	1	786	0.91	2	197	1.81	3	87	2.72	4	49	3.63	5	31	4.54	<table border="1"> <thead> <tr> <th>H(m)</th> <th>E(lx)</th> <th>D(m)</th> </tr> </thead> <tbody> <tr><td>1</td><td>2914</td><td>0.36</td></tr> <tr><td>2</td><td>729</td><td>0.73</td></tr> <tr><td>3</td><td>324</td><td>1.09</td></tr> <tr><td>4</td><td>182</td><td>1.45</td></tr> <tr><td>5</td><td>117</td><td>1.81</td></tr> </tbody> </table>	H(m)	E(lx)	D(m)	1	2914	0.36	2	729	0.73	3	324	1.09	4	182	1.45	5	117	1.81	<table border="1"> <thead> <tr> <th>H(m)</th> <th>E(lx)</th> <th>D(m)</th> </tr> </thead> <tbody> <tr><td>1</td><td>1273</td><td>0.58</td></tr> <tr><td>2</td><td>318</td><td>1.16</td></tr> <tr><td>3</td><td>141</td><td>1.75</td></tr> <tr><td>4</td><td>80</td><td>2.33</td></tr> <tr><td>5</td><td>51</td><td>2.91</td></tr> </tbody> </table>	H(m)	E(lx)	D(m)	1	1273	0.58	2	318	1.16	3	141	1.75	4	80	2.33	5	51	2.91	<table border="1"> <thead> <tr> <th>H(m)</th> <th>E(lx)</th> <th>D(m)</th> </tr> </thead> <tbody> <tr><td>1</td><td>374</td><td>1.00</td></tr> <tr><td>2</td><td>93</td><td>1.99</td></tr> <tr><td>3</td><td>42</td><td>2.99</td></tr> <tr><td>4</td><td>23</td><td>3.98</td></tr> <tr><td>5</td><td>15</td><td>4.98</td></tr> </tbody> </table>	H(m)	E(lx)	D(m)	1	374	1.00	2	93	1.99	3	42	2.99	4	23	3.98	5	15	4.98																			
H(m)	E(lx)	D(m)																																																																																												
1	786	0.91																																																																																												
2	197	1.81																																																																																												
3	87	2.72																																																																																												
4	49	3.63																																																																																												
5	31	4.54																																																																																												
H(m)	E(lx)	D(m)																																																																																												
1	2914	0.36																																																																																												
2	729	0.73																																																																																												
3	324	1.09																																																																																												
4	182	1.45																																																																																												
5	117	1.81																																																																																												
H(m)	E(lx)	D(m)																																																																																												
1	1273	0.58																																																																																												
2	318	1.16																																																																																												
3	141	1.75																																																																																												
4	80	2.33																																																																																												
5	51	2.91																																																																																												
H(m)	E(lx)	D(m)																																																																																												
1	374	1.00																																																																																												
2	93	1.99																																																																																												
3	42	2.99																																																																																												
4	23	3.98																																																																																												
5	15	4.98																																																																																												

































# Magic One Series

## —M5

 		<b>Model No.</b> M5 <b>Power</b> 20W <b>CCT</b> 2700K/3000K/3500K/4000K 2700~5700K <b>CRI</b> ON/OFF≥97 CCT Adjustable≥90 <b>Voltage</b> DC 48V AC220-240V~50/60Hz <b>Color</b> Black/White																																																																																												
<b>Compatible Adapters</b>     	<b>Control Way</b> Dimming-Onboard/0-10V DALI/DMX/CASAMBI/ZIGBEE Bluetooth																																																																																													
<b>Sign</b>      																																																																																														
<b>Class 1 Optical Accessories</b>   																																																																																														
<b>Class 2 Optical Accessories</b>        																																																																																														
<b>Class 3 Optical Accessories</b>   																																																																																														
<b>CCT</b> 4000K <b>CRI</b> Ra97																																																																																														
<b>Beam Angle</b> Fix Module-15°    Fix Module-20°    Fix Module-30°    Fix Module-40°    Zoom Module-10°																																																																																														
<b>Luminous Flux</b> 1465.31lm    1743.11lm    1726.91lm    1671.31lm    986.75lm																																																																																														
<b>Light Distribution</b>     																																																																																														
<table border="1"> <thead> <tr> <th>H(m)</th> <th>E(lx)</th> <th>D(m)</th> </tr> </thead> <tbody> <tr><td>1</td><td>15328</td><td>0.24</td></tr> <tr><td>2</td><td>3832</td><td>0.48</td></tr> <tr><td>3</td><td>1703</td><td>0.72</td></tr> <tr><td>4</td><td>958</td><td>0.96</td></tr> <tr><td>5</td><td>613</td><td>1.20</td></tr> </tbody> </table>	H(m)	E(lx)	D(m)	1	15328	0.24	2	3832	0.48	3	1703	0.72	4	958	0.96	5	613	1.20	<table border="1"> <thead> <tr> <th>H(m)</th> <th>E(lx)</th> <th>D(m)</th> </tr> </thead> <tbody> <tr><td>1</td><td>8987</td><td>0.40</td></tr> <tr><td>2</td><td>2247</td><td>0.81</td></tr> <tr><td>3</td><td>999</td><td>1.21</td></tr> <tr><td>4</td><td>562</td><td>1.62</td></tr> <tr><td>5</td><td>360</td><td>2.02</td></tr> </tbody> </table>	H(m)	E(lx)	D(m)	1	8987	0.40	2	2247	0.81	3	999	1.21	4	562	1.62	5	360	2.02	<table border="1"> <thead> <tr> <th>H(m)</th> <th>E(lx)</th> <th>D(m)</th> </tr> </thead> <tbody> <tr><td>1</td><td>4780</td><td>0.52</td></tr> <tr><td>2</td><td>1195</td><td>1.05</td></tr> <tr><td>3</td><td>531</td><td>1.57</td></tr> <tr><td>4</td><td>299</td><td>2.10</td></tr> <tr><td>5</td><td>191</td><td>2.62</td></tr> </tbody> </table>	H(m)	E(lx)	D(m)	1	4780	0.52	2	1195	1.05	3	531	1.57	4	299	2.10	5	191	2.62	<table border="1"> <thead> <tr> <th>H(m)</th> <th>E(lx)</th> <th>D(m)</th> </tr> </thead> <tbody> <tr><td>1</td><td>2580</td><td>0.65</td></tr> <tr><td>2</td><td>645</td><td>1.30</td></tr> <tr><td>3</td><td>287</td><td>1.95</td></tr> <tr><td>4</td><td>161</td><td>2.60</td></tr> <tr><td>5</td><td>103</td><td>3.24</td></tr> </tbody> </table>	H(m)	E(lx)	D(m)	1	2580	0.65	2	645	1.30	3	287	1.95	4	161	2.60	5	103	3.24	<table border="1"> <thead> <tr> <th>H(m)</th> <th>E(lx)</th> <th>D(m)</th> </tr> </thead> <tbody> <tr><td>1</td><td>16270</td><td>0.18</td></tr> <tr><td>2</td><td>4068</td><td>0.37</td></tr> <tr><td>3</td><td>1808</td><td>0.55</td></tr> <tr><td>4</td><td>1017</td><td>0.74</td></tr> <tr><td>5</td><td>651</td><td>0.92</td></tr> </tbody> </table>	H(m)	E(lx)	D(m)	1	16270	0.18	2	4068	0.37	3	1808	0.55	4	1017	0.74	5	651	0.92
H(m)	E(lx)	D(m)																																																																																												
1	15328	0.24																																																																																												
2	3832	0.48																																																																																												
3	1703	0.72																																																																																												
4	958	0.96																																																																																												
5	613	1.20																																																																																												
H(m)	E(lx)	D(m)																																																																																												
1	8987	0.40																																																																																												
2	2247	0.81																																																																																												
3	999	1.21																																																																																												
4	562	1.62																																																																																												
5	360	2.02																																																																																												
H(m)	E(lx)	D(m)																																																																																												
1	4780	0.52																																																																																												
2	1195	1.05																																																																																												
3	531	1.57																																																																																												
4	299	2.10																																																																																												
5	191	2.62																																																																																												
H(m)	E(lx)	D(m)																																																																																												
1	2580	0.65																																																																																												
2	645	1.30																																																																																												
3	287	1.95																																																																																												
4	161	2.60																																																																																												
5	103	3.24																																																																																												
H(m)	E(lx)	D(m)																																																																																												
1	16270	0.18																																																																																												
2	4068	0.37																																																																																												
3	1808	0.55																																																																																												
4	1017	0.74																																																																																												
5	651	0.92																																																																																												
<b>Beam Angle</b> Zoom Module-50°    Framing Zoom-18°    Framing Zoom-35°																																																																																														
<b>Luminous Flux</b> 1364.41lm    685.46lm    628.97lm																																																																																														
<b>Light Distribution</b>   																																																																																														
<table border="1"> <thead> <tr> <th>H(m)</th> <th>E(lx)</th> <th>D(m)</th> </tr> </thead> <tbody> <tr><td>1</td><td>1685</td><td>0.93</td></tr> <tr><td>2</td><td>421</td><td>1.86</td></tr> <tr><td>3</td><td>187</td><td>2.79</td></tr> <tr><td>4</td><td>105</td><td>3.72</td></tr> <tr><td>5</td><td>67</td><td>4.65</td></tr> </tbody> </table>	H(m)	E(lx)	D(m)	1	1685	0.93	2	421	1.86	3	187	2.79	4	105	3.72	5	67	4.65	<table border="1"> <thead> <tr> <th>H(m)</th> <th>E(lx)</th> <th>D(m)</th> </tr> </thead> <tbody> <tr><td>1</td><td>7520</td><td>0.31</td></tr> <tr><td>2</td><td>1880</td><td>0.62</td></tr> <tr><td>3</td><td>836</td><td>0.92</td></tr> <tr><td>4</td><td>470</td><td>1.23</td></tr> <tr><td>5</td><td>301</td><td>1.54</td></tr> </tbody> </table>	H(m)	E(lx)	D(m)	1	7520	0.31	2	1880	0.62	3	836	0.92	4	470	1.23	5	301	1.54	<table border="1"> <thead> <tr> <th>H(m)</th> <th>E(lx)</th> <th>D(m)</th> </tr> </thead> <tbody> <tr><td>1</td><td>1830</td><td>0.62</td></tr> <tr><td>2</td><td>458</td><td>1.24</td></tr> <tr><td>3</td><td>203</td><td>1.86</td></tr> <tr><td>4</td><td>114</td><td>2.48</td></tr> <tr><td>5</td><td>73</td><td>3.10</td></tr> </tbody> </table>	H(m)	E(lx)	D(m)	1	1830	0.62	2	458	1.24	3	203	1.86	4	114	2.48	5	73	3.10																																						
H(m)	E(lx)	D(m)																																																																																												
1	1685	0.93																																																																																												
2	421	1.86																																																																																												
3	187	2.79																																																																																												
4	105	3.72																																																																																												
5	67	4.65																																																																																												
H(m)	E(lx)	D(m)																																																																																												
1	7520	0.31																																																																																												
2	1880	0.62																																																																																												
3	836	0.92																																																																																												
4	470	1.23																																																																																												
5	301	1.54																																																																																												
H(m)	E(lx)	D(m)																																																																																												
1	1830	0.62																																																																																												
2	458	1.24																																																																																												
3	203	1.86																																																																																												
4	114	2.48																																																																																												
5	73	3.10																																																																																												

# Magic One Series

## M7

		<b>Model No.</b>	M7																																																																																												
		<b>Power</b>	30W																																																																																												
		<b>CCT</b>	2700K/3000K/3500K/4000K 2700~5700K																																																																																												
		<b>CRI</b>	ON/OFF≥97 CCT Adjustable≥90																																																																																												
		<b>Voltage</b>	AC220-240V~50/60Hz AC100-240V~50/60Hz																																																																																												
		<b>Color</b>	Black/White																																																																																												
<b>Compatible Adapters</b>	 Recessed  Surface Mounted  Track Mounted  Integrated Driver	<b>Control Way</b>	Dimming-Onboard/0-10V DALI/DMX/CASAMBI/ZIGBEE Bluetooth																																																																																												
<b>Sign</b>	   45°C -20°C  IP 20  10 DIMMING																																																																																														
<b>Class 1 Optical Accessories</b>	 Fix Lens Module  Zoom Lens Module  Framing Zoom Lens Module																																																																																														
<b>Class 2 Optical Accessories</b>	 Oval Lens  Softening Lens  Wall Washing Lens  Honey Comb  CCT Filter  UV Filter  Gradient Filter  ND Filter																																																																																														
<b>Class 3 Optical Accessories</b>	 Half Snoot  Full Snoot  Four Barndoor																																																																																														
<b>CCT</b>	4000K																																																																																														
<b>CRI</b>	Ra97																																																																																														
<b>Beam Angle</b>	Fix Module-15°	Fix Module-20°	Fix Module-30°	Fix Module-40°	Zoom Module-10°																																																																																										
<b>Luminous Flux</b>	2519.8lm	2672.5lm	2707.6lm	2615.6lm	1749.1lm																																																																																										
<b>Light Distribution</b>	 <table border="1"> <thead> <tr> <th>H(m)</th> <th>E(lx)</th> <th>D(m)</th> </tr> </thead> <tbody> <tr><td>1</td><td>18869</td><td>0.25</td></tr> <tr><td>2</td><td>4717</td><td>0.51</td></tr> <tr><td>3</td><td>2097</td><td>0.76</td></tr> <tr><td>4</td><td>1179</td><td>1.02</td></tr> <tr><td>5</td><td>755</td><td>1.27</td></tr> </tbody> </table>	H(m)	E(lx)	D(m)	1	18869	0.25	2	4717	0.51	3	2097	0.76	4	1179	1.02	5	755	1.27	 <table border="1"> <thead> <tr> <th>H(m)</th> <th>E(lx)</th> <th>D(m)</th> </tr> </thead> <tbody> <tr><td>1</td><td>14990</td><td>0.34</td></tr> <tr><td>2</td><td>3748</td><td>0.68</td></tr> <tr><td>3</td><td>1666</td><td>1.03</td></tr> <tr><td>4</td><td>937</td><td>1.37</td></tr> <tr><td>5</td><td>600</td><td>1.71</td></tr> </tbody> </table>	H(m)	E(lx)	D(m)	1	14990	0.34	2	3748	0.68	3	1666	1.03	4	937	1.37	5	600	1.71	 <table border="1"> <thead> <tr> <th>H(m)</th> <th>E(lx)</th> <th>D(m)</th> </tr> </thead> <tbody> <tr><td>1</td><td>6437</td><td>0.59</td></tr> <tr><td>2</td><td>1609</td><td>1.19</td></tr> <tr><td>3</td><td>715</td><td>1.78</td></tr> <tr><td>4</td><td>402</td><td>2.37</td></tr> <tr><td>5</td><td>258</td><td>2.96</td></tr> </tbody> </table>	H(m)	E(lx)	D(m)	1	6437	0.59	2	1609	1.19	3	715	1.78	4	402	2.37	5	258	2.96	 <table border="1"> <thead> <tr> <th>H(m)</th> <th>E(lx)</th> <th>D(m)</th> </tr> </thead> <tbody> <tr><td>1</td><td>4128</td><td>0.69</td></tr> <tr><td>2</td><td>1032</td><td>1.37</td></tr> <tr><td>3</td><td>459</td><td>2.06</td></tr> <tr><td>4</td><td>258</td><td>2.75</td></tr> <tr><td>5</td><td>165</td><td>3.44</td></tr> </tbody> </table>	H(m)	E(lx)	D(m)	1	4128	0.69	2	1032	1.37	3	459	2.06	4	258	2.75	5	165	3.44	 <table border="1"> <thead> <tr> <th>H(m)</th> <th>E(lx)</th> <th>D(m)</th> </tr> </thead> <tbody> <tr><td>1</td><td>26330</td><td>0.19</td></tr> <tr><td>2</td><td>6583</td><td>0.39</td></tr> <tr><td>3</td><td>2926</td><td>0.58</td></tr> <tr><td>4</td><td>1646</td><td>0.78</td></tr> <tr><td>5</td><td>1053</td><td>0.97</td></tr> </tbody> </table>	H(m)	E(lx)	D(m)	1	26330	0.19	2	6583	0.39	3	2926	0.58	4	1646	0.78	5	1053	0.97
H(m)	E(lx)	D(m)																																																																																													
1	18869	0.25																																																																																													
2	4717	0.51																																																																																													
3	2097	0.76																																																																																													
4	1179	1.02																																																																																													
5	755	1.27																																																																																													
H(m)	E(lx)	D(m)																																																																																													
1	14990	0.34																																																																																													
2	3748	0.68																																																																																													
3	1666	1.03																																																																																													
4	937	1.37																																																																																													
5	600	1.71																																																																																													
H(m)	E(lx)	D(m)																																																																																													
1	6437	0.59																																																																																													
2	1609	1.19																																																																																													
3	715	1.78																																																																																													
4	402	2.37																																																																																													
5	258	2.96																																																																																													
H(m)	E(lx)	D(m)																																																																																													
1	4128	0.69																																																																																													
2	1032	1.37																																																																																													
3	459	2.06																																																																																													
4	258	2.75																																																																																													
5	165	3.44																																																																																													
H(m)	E(lx)	D(m)																																																																																													
1	26330	0.19																																																																																													
2	6583	0.39																																																																																													
3	2926	0.58																																																																																													
4	1646	0.78																																																																																													
5	1053	0.97																																																																																													
<b>Beam Angle</b>	Zoom Module-50°	Framing Zoom-25°	Framing Zoom-40°																																																																																												
<b>Luminous Flux</b>	2294.2lm	1102.0lm	1153.9lm																																																																																												
<b>Light Distribution</b>	 <table border="1"> <thead> <tr> <th>H(m)</th> <th>E(lx)</th> <th>D(m)</th> </tr> </thead> <tbody> <tr><td>1</td><td>3016</td><td>0.88</td></tr> <tr><td>2</td><td>754</td><td>1.76</td></tr> <tr><td>3</td><td>335</td><td>2.64</td></tr> <tr><td>4</td><td>189</td><td>3.52</td></tr> <tr><td>5</td><td>121</td><td>4.40</td></tr> </tbody> </table>	H(m)	E(lx)	D(m)	1	3016	0.88	2	754	1.76	3	335	2.64	4	189	3.52	5	121	4.40	 <table border="1"> <thead> <tr> <th>H(m)</th> <th>E(lx)</th> <th>D(m)</th> </tr> </thead> <tbody> <tr><td>1</td><td>6205</td><td>0.45</td></tr> <tr><td>2</td><td>1551</td><td>0.90</td></tr> <tr><td>3</td><td>689</td><td>1.36</td></tr> <tr><td>4</td><td>388</td><td>1.81</td></tr> <tr><td>5</td><td>248</td><td>2.26</td></tr> </tbody> </table>	H(m)	E(lx)	D(m)	1	6205	0.45	2	1551	0.90	3	689	1.36	4	388	1.81	5	248	2.26	 <table border="1"> <thead> <tr> <th>H(m)</th> <th>E(lx)</th> <th>D(m)</th> </tr> </thead> <tbody> <tr><td>1</td><td>2937</td><td>0.67</td></tr> <tr><td>2</td><td>734</td><td>1.33</td></tr> <tr><td>3</td><td>326</td><td>2.00</td></tr> <tr><td>4</td><td>184</td><td>2.66</td></tr> <tr><td>5</td><td>118</td><td>3.33</td></tr> </tbody> </table>	H(m)	E(lx)	D(m)	1	2937	0.67	2	734	1.33	3	326	2.00	4	184	2.66	5	118	3.33																																						
H(m)	E(lx)	D(m)																																																																																													
1	3016	0.88																																																																																													
2	754	1.76																																																																																													
3	335	2.64																																																																																													
4	189	3.52																																																																																													
5	121	4.40																																																																																													
H(m)	E(lx)	D(m)																																																																																													
1	6205	0.45																																																																																													
2	1551	0.90																																																																																													
3	689	1.36																																																																																													
4	388	1.81																																																																																													
5	248	2.26																																																																																													
H(m)	E(lx)	D(m)																																																																																													
1	2937	0.67																																																																																													
2	734	1.33																																																																																													
3	326	2.00																																																																																													
4	184	2.66																																																																																													
5	118	3.33																																																																																													

# VG Zoomable Framing GOBO Light Series



Optics&Structure → Dual Patented Product



SHAPEABLE



ZOOMABLE



PROJECTION



SMART CONTROL



High-Quality + Precision-Grade = Professional-Grade


Optical lenses


Accessories

Lens







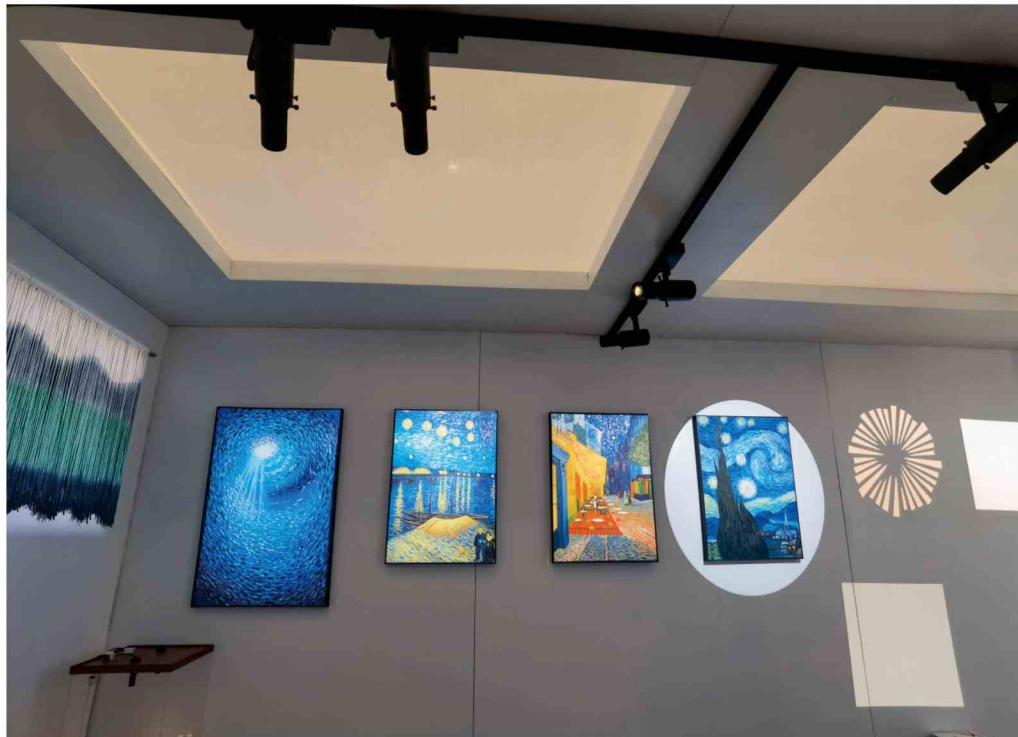

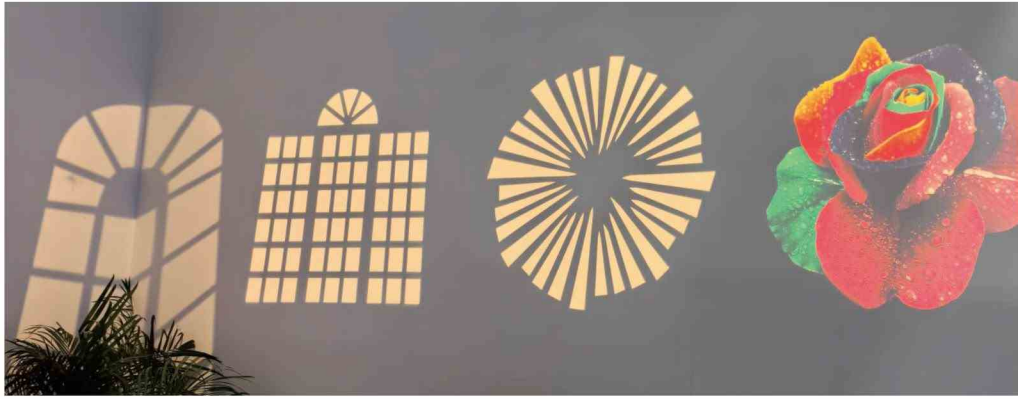patented design of mechanical damping  
no need to apply any grease  
the damping is smooth and stable for long-term use























# VG Framing GOBO Light Series

— VG4510-2035

 	<b>Model No.</b>	VG4510-2035
	<b>Power</b>	10W
	<b>CCT</b>	2700K/3000K/3500K/4000K 2700~5700K
	<b>CRI</b>	ON/OFF≥95 CCT Adjustable≥90
	<b>Beam Angle</b>	20°-35°
	<b>Number of lenses</b>	7PCS
	<b>Distortion</b>	≤2.0%
	<b>Input Voltage</b>	DC 48V AC220-240V~50/60Hz
	<b>Color</b>	Black/White
<b>Compatible Adapters</b>	   	<b>Control Way</b> Dimming-Onboard/0-10V DALI/DMX/CASAMBI/ZIGBEE Bluetooth





<b>Sign</b>	     
-------------	---

<b>Light Shapes</b>	     
---------------------	---

<b>Accessories</b>	<b>Name</b>	<b>Specification</b>	<b>Accessories Display</b>					
	Filter	37mm	      					
	LOGO PCS	Outer Diameter23mm Content Diameter≤12mm	    					





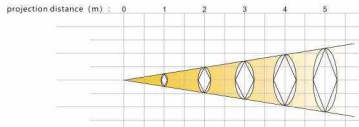

<b>CCT</b>	4000K
<b>CRI</b>	Ra95







<b>Beam Angle</b>	20°	35°
<b>Luminous Flux</b>	411.06lm(Ra95)	413.03lm(Ra95)

<b>Light Distribution</b>			20° projection distance (m) : 0 1 2 3 4 5 
	H(m)	E(lx) D(m)	
			35° projection distance (m) : 0 1 2 3 4 5 
	H(m)	E(lx) D(m)	













# VG Framing GOBO Light Series

— VG4510-2035-EG

 	<b>Model No.</b>	VG4510-2035-EG
	<b>Power</b>	10W
	<b>CCT</b>	2700K/3000K/3500K/4000K 2700~5700K
	<b>CRI</b>	ON/OFF≥95 CCT Adjustable≥90
	<b>Beam Angle</b>	20°-35°
	<b>Number of lenses</b>	7PCS
	<b>Distortion</b>	≤2.0%
	<b>Input Voltage</b>	DC 48V AC220-240V~50/60Hz
	<b>Color</b>	Black/White
<b>Compatible Adapters</b>	   	<b>Control Way</b> Dimming-Onboard/0-10V DALI/DMX/CASAMBI/ZIGBEE Bluetooth





<b>Sign</b>	     
-------------	---

<b>Light Shapes</b>	     
---------------------	---

<b>Accessories</b>	<b>Name</b>	<b>Specification</b>	<b>Accessories Display</b>					
	Filter	37mm	      					
	LOGO PCS	Outer Diameter23mm Content Diameter≤12mm	    					





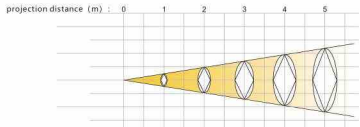

<b>CCT</b>	4000K
<b>CRI</b>	Ra95







<b>Beam Angle</b>	20°	35°
<b>Luminous Flux</b>	411.06lm(Ra95)	413.03lm(Ra95)

<b>Light Distribution</b>			20° projection distance (m) : 0 1 2 3 4 5 
	H(m)	E(lx) D(m)	
			35° projection distance (m) : 0 1 2 3 4 5 
	H(m)	E(lx) D(m)	













# VG Framing GOBO Light Series

—VG4510-2035-PLUS

 	<b>Model No.</b>	VG4510-2035-PLUS
	<b>Power</b>	10W
	<b>CCT</b>	2700K/3000K/3500K/4000K 2700~5700K
	<b>CRI</b>	ON/OFF≥95 CCT Adjustable≥90
	<b>Beam Angle</b>	20°-35°
	<b>Number of lenses</b>	8PCS
	<b>Distortion</b>	≤1.2%
	<b>Input Voltage</b>	DC 48V AC220-240V~50/60Hz
	<b>Color</b>	Black/White
<b>Compatible Adapters</b>	   	<b>Control Way</b> Dimming-Onboard/0-10V DALI/DMX/CASAMBI/ZIGBEE Bluetooth




<b>Sign</b>	     
-------------	---

<b>Light Shapes</b>	     
---------------------	---

<b>Accessories</b>	<b>Name</b>	<b>Specification</b>	<b>Accessories Display</b>					
	Filter	37mm	      					
	LOGO PCS	Outer Diameter23mm Content Diameter≤14mm	    					





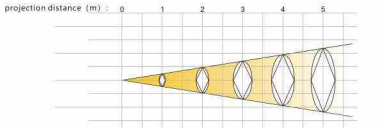

<b>CCT</b>	4000K
<b>CRI</b>	Ra95







<b>Beam Angle</b>	20°	35°
<b>Luminous Flux</b>	393.44lm(Ra95)	400.43lm(Ra95)

<b>Light Distribution</b>			20° 
	H(m)	E(lx) D(m)	
	1	3125 0.38	35° 
	2	788 0.76	
	3	350 1.14	35° 35°circular spot diameter(m): 0 φ0.60 φ1.20 φ1.80 φ2.40 φ3.00 35°square spot edge length(m): 0 0.42 0.84 1.27 1.69 2.12
	4	197 1.52	
	5	126 1.90	













# VG Framing GOBO Light Series

— VG4510-2035-PLUS-EG

 	<b>Model No.</b>	VG4510-2035-PLUS-EG
	<b>Power</b>	10W
	<b>CCT</b>	2700K/3000K/3500K/4000K 2700~5700K
	<b>CRI</b>	ON/OFF≥95 CCT Adjustable≥90
	<b>Beam Angle</b>	20°-35°
	<b>Number of lenses</b>	8PCS
	<b>Distortion</b>	≤1.2%
	<b>Input Voltage</b>	DC 48V AC220-240V~50/60Hz
	<b>Color</b>	Black/White
<b>Compatible Adapters</b>	   	<b>Control Way</b> Dimming-Onboard/0-10V DALI/DMX/CASAMBI/ZIGBEE Bluetooth




<b>Sign</b>	     
-------------	---

<b>Light Shapes</b>	     
---------------------	---

<b>Accessories</b>	<b>Name</b>	<b>Specification</b>	<b>Accessories Display</b>					
	Filter	37mm	      					
	LOGO PCS	Outer Diameter23mm Content Diameter≤14mm	    					

<b>CCT</b>	4000K
<b>CRI</b>	Ra95





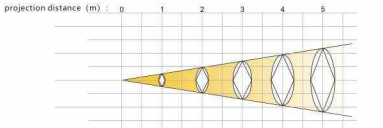





























<b>Beam Angle</b>	20°	35°
<b>Luminous Flux</b>	393.44lm(Ra95)	400.43lm(Ra95)

<b>Light Distribution</b>			20° 
	H(m)	E(lx) D(m)	
	1	3125 0.38	35° 
	2	788 0.76	
	3	350 1.14	35° 35°circular spot diameter(m): 0 φ0.60 φ1.20 φ1.80 φ2.40 φ3.00 35°square spot edge length(m): 0 0.42 0.84 1.27 1.69 2.12
	4	197 1.52	
	5	126 1.90	









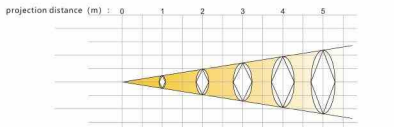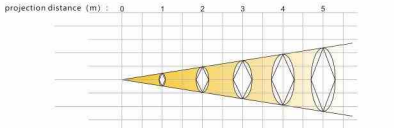



























# VG Framing GOBO Light Series

—VG5515-2035-PLUS

 	<b>Model No.</b>	VG5515-2035-PLUS		
	<b>Power</b>	15W		
	<b>CCT</b>	2700K/3000K/3500K/4000K 2700~5700K		
	<b>CRI</b>	ON/OFF≥95 CCT Adjustable≥90		
	<b>Beam Angle</b>	20°-35°		
	<b>Number of lenses</b>	8PCS		
	<b>Distortion</b>	≤1.2%		
	<b>Input Voltage</b>	DC 48V AC220-240V~50/60Hz		
	<b>Color</b>	Black/White		
<b>Compatible Adapters</b>	   	<b>Control Way</b>	Dimming-Onboard/0-10V DALI/DMX/CASAMBI/ZIGBEE Bluetooth	
<b>Sign</b>	     			
<b>Light Shapes</b>	     			
<b>Accessories</b>	<b>Name</b>	<b>Specification</b>	<b>Accessories Display</b>	
	Filter	37mm	      	
	LOGO PCS	Outer Diameter23mm Content Diameter≤14mm	    	
<b>CCT</b>	4000K			
<b>CRI</b>	Ra95			
<b>Beam Angle</b>	20°	35°		
<b>Luminous Flux</b>	510.48lm(Ra95)	498.03lm(Ra95)		
<b>Light Distribution</b>			 <p>projection distance (m) : 0 1 2 3 4 5</p> <p>20°circular spot diameter(m): 0 φ0.35 φ0.70 φ1.05 φ1.40 φ1.75</p> <p>20°square spot edge length(m): 0 0.24 0.49 0.74 0.98 1.23</p>	
				 <p>projection distance (m) : 0 1 2 3 4 5</p> <p>35°circular spot diameter(m): 0 φ0.60 φ1.20 φ1.80 φ2.40 φ3.00</p> <p>35°square spot edge length(m): 0 0.42 0.84 1.27 1.69 2.12</p>
	H(m)	E(lx) D(m)		
	1	4089 0.38	1 1655 0.60	
	2	1022 0.76	2 414 1.20	
	3	454 1.14	3 184 1.80	
4	256 1.52	4 103 2.40		
5	164 1.89	5 66 3.00		







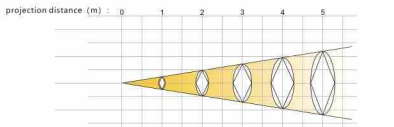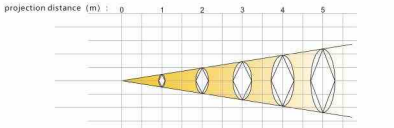



























# VG Framing GOBO Light Series

— VG-MIX20-2035

 	<b>Model No.</b>	VG-MIX20-2035		
	<b>Power</b>	20W		
	<b>CCT</b>	2700K/3000K/3500K/4000K 2700~5700K		
	<b>CRI</b>	ON/OFF≥95 CCT Adjustable≥90		
	<b>Beam Angle</b>	20°-35°		
	<b>Number of lenses</b>	7PCS		
	<b>Distortion</b>	≤2.0%		
	<b>Input Voltage</b>	DC 48V AC220-240V~50/60Hz		
	<b>Color</b>	Black/White		
<b>Compatible Adapters</b>	   	<b>Control Way</b>	Dimming-Onboard/0-10V DALI/DMX/CASAMBI/ZIGBEE Bluetooth	
<b>Sign</b>	     			
<b>Light Shapes</b>	     			
<b>Accessories</b>	<b>Name</b>	<b>Specification</b>	<b>Accessories Display</b>	
	Filter	37mm	      	
	LOGO PCS	Outer Diameter23mm Content Diameter≤12mm	    	
<b>CCT</b>	4000K			
<b>CRI</b>	Ra95			
<b>Beam Angle</b>	20°	35°		
<b>Luminous Flux</b>	536.16lm(Ra95)	484.05lm(Ra95)		
<b>Light Distribution</b>			 <p>projection distance (m) : 0 1 2 3 4 5</p> <p>20°circular spot diameter(m): 0 φ0.35 φ0.70 φ1.05 φ1.40 φ1.75</p> <p>20°square spot edge length(m): 0 0.24 0.49 0.74 0.98 1.23</p>	
				 <p>projection distance (m) : 0 1 2 3 4 5</p> <p>35°circular spot diameter(m): 0 φ0.60 φ1.20 φ1.80 φ2.40 φ3.00</p> <p>35°square spot edge length(m): 0 0.42 0.84 1.27 1.69 2.12</p>
	H(m)	E(lx) D(m)		
	1	3630 0.39	1 1583 0.59	
	2	908 0.79	2 396 1.18	
	3	403 1.18	3 176 1.77	
4	227 1.58	4 99 2.35		
5	145 1.97	5 63 2.94		







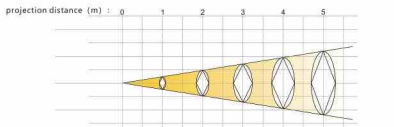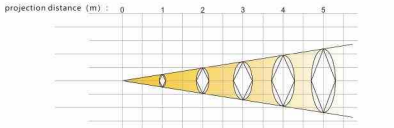



























# VG Framing GOBO Light Series

— VG8530-2540


 	<b>Model No.</b>	VG8530-2540	
	<b>Power</b>	30W	
	<b>CCT</b>	2700K/3000K/3500K/4000K 2700~5700K	
	<b>CRI</b>	ON/OFF≥95 CCT Adjustable≥90	
	<b>Beam Angle</b>	25°-40°	
	<b>Number of lenses</b>	8PCS	
	<b>Distortion</b>	≤2.0%	
	<b>Input Voltage</b>	AC220-240V~50/60Hz AC100-240V~50/60Hz	
<b>Color</b>	Black/White		
<b>Compatible Adapters</b>	   	<b>Control Way</b>	Dimming-Onboard/0-10V DALI/DMX/CASAMBI/ZIGBEE Bluetooth
<b>Sign</b>	     		
<b>Light Shapes</b>	     		
<b>Accessories</b>	<b>Name</b>	<b>Specification</b>	<b>Accessories Display</b>
	Filter	58mm	      
	LOGO PCS	Outer Diameter30mm Content Diameter≤15mm	    
<b>CCT</b>	4000K		
<b>CRI</b>	Ra95		
<b>Beam Angle</b>	25°	40°	
<b>Luminous Flux</b>	1212.1lm(Ra95)	1189.7lm(Ra95)	
<b>Light Distribution</b>			 <p>projection distance (m) : 0 1 2 3 4 5</p> <p>25°circular spot diameter(m): 0 φ0.44 φ0.88 φ1.32 φ1.76 φ2.20</p> <p>25°square spot edge length(m): 0 0.31 0.62 0.93 1.24 1.55</p>
			
	H(m)	E(lx) D(m)	
	1	6484 0.44	
	2	1621 0.87	
3	720 1.31		
4	405 1.74		
5	259 2.18		
H(m)	E(lx) D(m)		
1	3183 0.64		
2	796 1.28		
3	354 1.92		
4	199 2.56		
5	127 3.20		
 <p>projection distance (m) : 0 1 2 3 4 5</p> <p>40°circular spot diameter(m): 0 φ0.72 φ1.44 φ2.16 φ2.88 φ3.60</p> <p>40°square spot edge length(m): 0 0.50 1.01 1.52 2.03 2.54</p>			

# VG Framing GOBO Light Series

— VG8530-5060

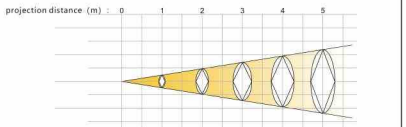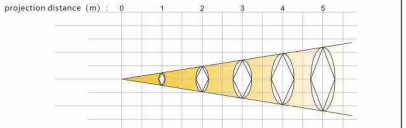 	<b>Model No.</b>	VG8530-5060	
	<b>Power</b>	30W	
	<b>CCT</b>	2700K/3000K/3500K/4000K 2700~5700K	
	<b>CRI</b>	ON/OFF≥95 CCT Adjustable≥90	
	<b>Beam Angle</b>	50°-60°	
	<b>Number of lenses</b>	14PCS	
	<b>Distortion</b>	≤1.0%	
	<b>Input Voltage</b>	AC220-240V~50/60Hz AC100-240V~50/60Hz	
<b>Color</b>	Black/White		
<b>Compatible Adapters</b>	   	<b>Control Way</b>	Dimming-Onboard/0-10V DALI/DMX/CASAMBI/ZIGBEE Bluetooth
<b>Sign</b>	     		
<b>Light Shapes</b>	     		
<b>Accessories</b>	<b>Name</b>	<b>Specification</b>	<b>Accessories Display</b>
	Filter	55mm	      
	LOGO PCS	Outer Diameter30mm Content Diameter≤20mm	    
<b>CCT</b>	4000K		
<b>CRI</b>	Ra95		
<b>Beam Angle</b>	50°	60°	
<b>Luminous Flux</b>	553.52lm(Ra95)	669.58lm(Ra95)	
<b>Light Distribution</b>			 <p>projection distance (m) : 0 1 2 3 4 5</p> <p>50°circular spot diameter(m): 0 φ0.93 φ1.86 φ2.79 φ3.72 φ4.65</p> <p>50°square spot edge length(m): 0 0.65 1.30 1.95 2.60 3.25</p>
			
	H(m)	E(lx) D(m)	
	1	749 0.91	
	2	187 1.82	
3	83 2.73		
4	47 3.64		
5	30 4.55		
H(m)	E(lx) D(m)		
1	605 1.12		
2	151 2.24		
3	67 3.36		
4	38 4.48		
5	24 5.59		
 <p>projection distance (m) : 0 1 2 3 4 5</p> <p>60°circular spot diameter(m): 0 φ1.15 φ2.30 φ3.45 φ4.60 φ5.75</p> <p>60°square spot edge length(m): 0 0.82 1.64 2.46 3.28 4.10</p>			

## VF Framing GOBO Light Series

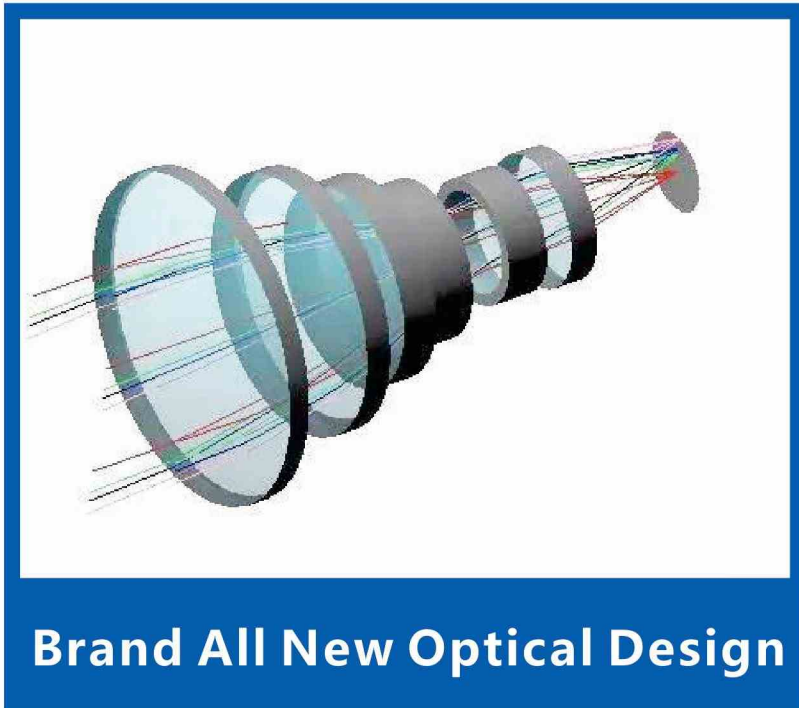

### ● Zoom series

Zoom angle range  $18^{\circ}$ - $35^{\circ}$   
No distortion, high-definition projection




### ● Fixed series

Fixed angle  $55^{\circ}$   
No distortion, high-definition projection



《大林寺桃花》  
—白居易  
人间四月芳菲尽，  
山寺桃花始盛开。  
长恨春归无觅处，  
不知转入此中来。

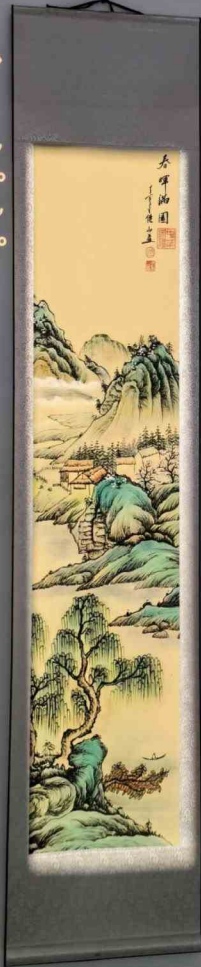

《山行》  
—杜牧  
远上寒山石径斜，  
白云生处有人家。  
停车坐爱枫林晚，  
霜叶红于二月花。



《惠州》  
山色有无中  
烟雨蒙蒙  
日暖风和  
不似寻常

《山景奇观》

山峦叠嶂，峻影幢幢。其巔有松，名曰迎客，傲然挺立于绝壁，枝干夭矫，若凤翥龙翔。雾縠氤氲于其间，或浓若墨，或淡若烟，如绡如练，缥缈幽玄，与山与松浑然相融。山雾溟溟，时而避其貌，时而现其影，恰似瑶台之界。松在雾里，愈觉苍劲雄浑，神采超逸，以候八方来客，迎晨曦暮霭，经悠悠岁月而弗变其姿，诚为乾坤之殊景也。



# VF Framing GOBO Light Series

—VF2303-1835

	<b>Model No.</b>	VF2303-1835
	<b>Power</b>	3W
	<b>CCT</b>	2700K/3000K/4000K
	<b>CRI</b>	ON/OFF≥97
	<b>Beam Angle</b>	18°-35°
	<b>Number of lenses</b>	10PCS
	<b>Distortion</b>	≤1.2%
	<b>Input Voltage</b>	DC 24V / DC 48V AC100-240V~50/60Hz
	<b>Color</b>	Black/White
<b>Compatible Adapters</b>		<b>Control Way</b> Dimming-Onboard DALI/CASAMBI
<b>Sign</b>		
<b>Light Shapes</b>		
<b>Accessories</b>	<b>Name</b>	<b>Specification</b>
	LOGO PCS	Outer Diameter 10mm Content Diameter ≤ 6mm
<b>Accessories Display</b>		
<b>CCT</b>	4000K	
<b>CRI</b>	Ra97	
<b>Beam Angle</b>	18°	35°
<b>Luminous Flux</b>	39.040lm(Ra97)	39.316lm(Ra97)
<b>Light Distribution</b>		
	projection distance (m) : 0 0.1 0.2 0.3 0.4 0.5 18° circular spot diameter(m): 0 φ0.032 φ0.063 φ0.095 φ0.127 φ0.158 18° square spot edge length(m): 0 0.022 0.045 0.067 0.090 0.112	
	projection distance (m) : 0 0.1 0.2 0.3 0.4 0.5 35° circular spot diameter(m): 0 φ0.063 φ0.126 φ0.189 φ0.252 φ0.315 35° square spot edge length(m): 0 0.045 0.089 0.134 0.178 0.223	



# VF Framing GOBO Light Series







—VF4510-55

	<b>Model No.</b>	VF4510-55
	<b>Power</b>	10W
	<b>CCT</b>	2700K/3000K/3500K/4000K 2700~5700K
	<b>CRI</b>	ON/OFF≥97 CCT Adjustable≥90
	<b>Beam Angle</b>	55°
	<b>Number of lenses</b>	10PCS
	<b>Distortion</b>	≤1.0%
	<b>Input Voltage</b>	DC 48V AC220-240V~50/60Hz
	<b>Color</b>	Black/White
<b>Compatible Adapters</b>		<b>Control Way</b> Dimming-Onboard/0-10V DALI/DMX/CASAMBI/ZIGBEE Bluetooth
<b>Sign</b>		
<b>Light Shapes</b>		
<b>Accessories</b>	<b>Name</b>	<b>Specification</b>
	Filter	37mm
<b>Accessories Display</b>		
<b>Accessories</b>	<b>Name</b>	<b>Specification</b>
	LOGO PCS	Outer Diameter 23mm Content Diameter ≤ 14mm
<b>Accessories Display</b>		
<b>CCT</b>	4000K	
<b>CRI</b>	Ra97	
<b>Beam Angle</b>	55°	
<b>Luminous Flux</b>	313.69lm(Ra97)	
<b>Light Distribution</b>		
	projection distance (m) : 0 1 2 3 4 5 55° circular spot diameter(m): 0 φ1.00 φ2.00 φ3.00 φ4.00 φ5.00 55° square spot edge length(m): 0 0.71 1.42 2.13 2.84 3.55	
	H(m) E(lx) D(m) 1 374 1.00 2 93 1.99 3 42 2.99 4 23 3.98 5 15 4.98	
	H(m) E(lx) D(m) 1 428 0.30 2 107 0.61 3 48 0.91 4 27 1.21 5 17 1.52	













# VF Framing GOBO Light Series

— VF4510-55-EG



 	<b>Model No.</b>	VF4510-55-EG
	<b>Power</b>	10W
	<b>CCT</b>	2700K/3000K/3500K/4000K 2700~5700K
	<b>CRI</b>	ON/OFF≥97 CCT Adjustable≥90
	<b>Beam Angle</b>	55°
	<b>Number of lenses</b>	10PCS
	<b>Distortion</b>	≤1.0%
	<b>Input Voltage</b>	DC 48V AC220-240V~50/60Hz
	<b>Color</b>	Black/White
	<b>Control Way</b>	Dimming-Onboard/0-10V DALI/DMX/CASAMBI/ZIGBEE Bluetooth

<b>Sign</b>	     
-------------	---

<b>Light Shapes</b>	     
---------------------	---



<b>Accessories</b>	<b>Name</b>	<b>Specification</b>	<b>Accessories Display</b>						
	Filter	37mm							
	LOGO PCS	Outer Diameter23mm Content Diameter≤14mm							



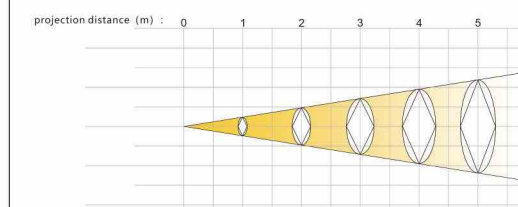







<b>CCT</b>	4000K
<b>CRI</b>	Ra97
<b>Beam Angle</b>	55°
<b>Luminous Flux</b>	313.69lm(Ra97)

<b>Light Distribution</b>																																		
	<table border="1"> <thead> <tr> <th>H(m)</th> <th>E(lx)</th> <th>D(m)</th> </tr> </thead> <tbody> <tr><td>1</td><td>374</td><td>1.00</td></tr> <tr><td>2</td><td>93</td><td>1.99</td></tr> <tr><td>3</td><td>42</td><td>2.99</td></tr> <tr><td>4</td><td>23</td><td>3.98</td></tr> <tr><td>5</td><td>15</td><td>4.98</td></tr> </tbody> </table>	H(m)	E(lx)	D(m)	1	374	1.00	2	93	1.99	3	42	2.99	4	23	3.98	5	15	4.98	<table border="1"> <thead> <tr> <th>55°circular spot diameter(m):</th> <th>0</th> <th>φ1.00</th> <th>φ2.00</th> <th>φ3.00</th> <th>φ4.00</th> <th>φ5.00</th> </tr> </thead> <tbody> <tr> <td>55°square spot edge length(m):</td> <td>0</td> <td>0.71</td> <td>1.42</td> <td>2.13</td> <td>2.84</td> <td>3.55</td> </tr> </tbody> </table>	55°circular spot diameter(m):	0	φ1.00	φ2.00	φ3.00	φ4.00	φ5.00	55°square spot edge length(m):	0	0.71	1.42	2.13	2.84	3.55
	H(m)	E(lx)	D(m)																															
1	374	1.00																																
2	93	1.99																																
3	42	2.99																																
4	23	3.98																																
5	15	4.98																																
55°circular spot diameter(m):	0	φ1.00	φ2.00	φ3.00	φ4.00	φ5.00																												
55°square spot edge length(m):	0	0.71	1.42	2.13	2.84	3.55																												













# VF Framing GOBO Light Series

— VF5515-55



 	<b>Model No.</b>	VF5515-55
	<b>Power</b>	15W
	<b>CCT</b>	2700K/3000K/3500K/4000K 2700~5700K
	<b>CRI</b>	ON/OFF≥95 CCT Adjustable≥90
	<b>Beam Angle</b>	55°
	<b>Number of lenses</b>	10PCS
	<b>Distortion</b>	≤1.0%
	<b>Input Voltage</b>	DC 48V AC220-240V~50/60Hz
	<b>Color</b>	Black/White
	<b>Control Way</b>	Dimming-Onboard/0-10V DALI/DMX/CASAMBI/ZIGBEE Bluetooth

<b>Compatible Adapters</b>	   	<b>Sign</b>	     
----------------------------	---	-------------	---

<b>Light Shapes</b>	     
---------------------	---







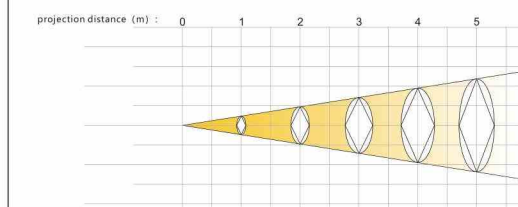



























<b>Accessories</b>	<b>Name</b>	<b>Specification</b>	<b>Accessories Display</b>						
	Filter	37mm							
	LOGO PCS	Outer Diameter23mm Content Diameter≤14mm							

<b>CCT</b>	4000K
<b>CRI</b>	Ra95
<b>Beam Angle</b>	55°
<b>Luminous Flux</b>	407.80lm(Ra95)

<b>Light Distribution</b>																																		
	<table border="1"> <thead> <tr> <th>H(m)</th> <th>E(lx)</th> <th>D(m)</th> </tr> </thead> <tbody> <tr><td>1</td><td>479</td><td>0.99</td></tr> <tr><td>2</td><td>120</td><td>1.98</td></tr> <tr><td>3</td><td>53</td><td>2.98</td></tr> <tr><td>4</td><td>30</td><td>3.97</td></tr> <tr><td>5</td><td>19</td><td>4.96</td></tr> </tbody> </table>	H(m)	E(lx)	D(m)	1	479	0.99	2	120	1.98	3	53	2.98	4	30	3.97	5	19	4.96	<table border="1"> <thead> <tr> <th>55°circular spot diameter(m):</th> <th>0</th> <th>φ1.00</th> <th>φ2.00</th> <th>φ3.00</th> <th>φ4.00</th> <th>φ5.00</th> </tr> </thead> <tbody> <tr> <td>55°square spot edge length(m):</td> <td>0</td> <td>0.71</td> <td>1.42</td> <td>2.13</td> <td>2.84</td> <td>3.55</td> </tr> </tbody> </table>	55°circular spot diameter(m):	0	φ1.00	φ2.00	φ3.00	φ4.00	φ5.00	55°square spot edge length(m):	0	0.71	1.42	2.13	2.84	3.55
	H(m)	E(lx)	D(m)																															
1	479	0.99																																
2	120	1.98																																
3	53	2.98																																
4	30	3.97																																
5	19	4.96																																
55°circular spot diameter(m):	0	φ1.00	φ2.00	φ3.00	φ4.00	φ5.00																												
55°square spot edge length(m):	0	0.71	1.42	2.13	2.84	3.55																												

# VF Framing GOBO Light Series

—VF6520-1835

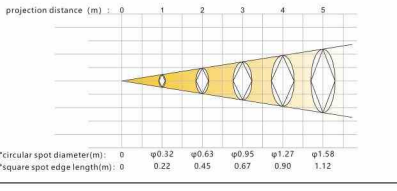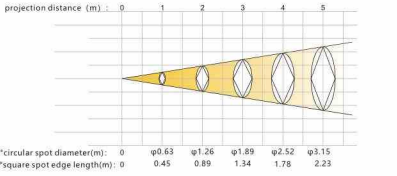 		<b>Model No.</b>	VF6520-1835																																				
		<b>Power</b>	20W																																				
		<b>CCT</b>	2700K/3000K/3500K/4000K 2700~5700K																																				
		<b>CRI</b>	ON/OFF≥97 CCT Adjustable≥90																																				
		<b>Beam Angle</b>	18°-35°																																				
		<b>Number of lenses</b>	12PCS																																				
		<b>Distortion</b>	≤1.5%																																				
		<b>Input Voltage</b>	DC 48V AC220-240V~50/60Hz																																				
		<b>Color</b>	Black/White																																				
<b>Compatible Adapters</b>	 Recessed  Surface Mounted  Magnetic Track  Track Mounted	<b>Control Way</b>	Dimming-Onboard/0-10V DALI/DMX/CASAMBI/ZIGBEE Bluetooth																																				
<b>Sign</b>	     																																						
<b>Light Shapes</b>	 Circle  Trapezoid  Irregular Shape  Square  Rhombus  Triangle																																						
<b>Accessories</b>	<b>Name</b>	<b>Specification</b>	<b>Accessories Display</b>																																				
	Filter	49mm	 UV Filter  CCT Filter  Softening Filter  Gradient Filter  ND Filter  Polarizing Filter  Customized Filter																																				
	LOGO PCS	Outer Diameter23mm Content Diameter≤20mm	 Landscape Physical Projection  Logo Projection  Starry Sky Projection  Marketing Projection  Food Projection																																				
<b>CCT</b>	4000K																																						
<b>CRI</b>	Ra97																																						
<b>Beam Angle</b>	18°	35°																																					
<b>Luminous Flux</b>	685.46lm(Ra97)	628.97lm(Ra97)																																					
<b>Light Distribution</b>																																							
																																							
	<table border="1"> <thead> <tr> <th>H(m)</th> <th>E(lx)</th> <th>D(m)</th> </tr> </thead> <tbody> <tr><td>1</td><td>7520</td><td>0.31</td></tr> <tr><td>2</td><td>1880</td><td>0.62</td></tr> <tr><td>3</td><td>836</td><td>0.92</td></tr> <tr><td>4</td><td>470</td><td>1.23</td></tr> <tr><td>5</td><td>301</td><td>1.54</td></tr> </tbody> </table>	H(m)	E(lx)	D(m)	1	7520	0.31	2	1880	0.62	3	836	0.92	4	470	1.23	5	301	1.54	<table border="1"> <thead> <tr> <th>H(m)</th> <th>E(lx)</th> <th>D(m)</th> </tr> </thead> <tbody> <tr><td>1</td><td>1830</td><td>0.62</td></tr> <tr><td>2</td><td>458</td><td>1.24</td></tr> <tr><td>3</td><td>203</td><td>1.86</td></tr> <tr><td>4</td><td>114</td><td>2.48</td></tr> <tr><td>5</td><td>73</td><td>3.10</td></tr> </tbody> </table>	H(m)	E(lx)	D(m)	1	1830	0.62	2	458	1.24	3	203	1.86	4	114	2.48	5	73	3.10	
H(m)	E(lx)	D(m)																																					
1	7520	0.31																																					
2	1880	0.62																																					
3	836	0.92																																					
4	470	1.23																																					
5	301	1.54																																					
H(m)	E(lx)	D(m)																																					
1	1830	0.62																																					
2	458	1.24																																					
3	203	1.86																																					
4	114	2.48																																					
5	73	3.10																																					